



1111 Institutional Caster Series

PP (black) Wheel Diameter x Wheel Width 75 x 32mm


EAN

YJ-11110300296123

Side Brake Locking system. Thread-Riveted Stamping Fork—1/2"-13 Extended control lever surface, Mounting Type - Threaded Stem device + anti-loosening glue Polypropylene Wheel Center and Wheel Tread Black, wheel—Anti-thread wheel cover.

Wheel tread: PP polypropylene  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

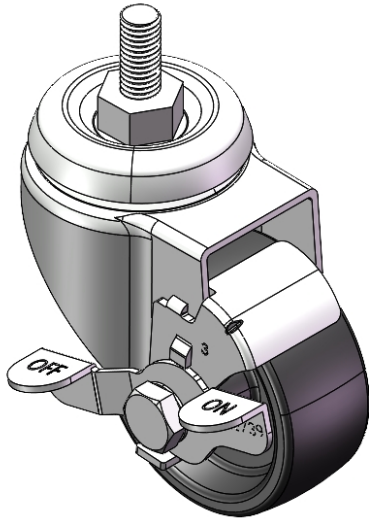

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                               |
| Wheel Diameter                                                         | 3 "                           |
| Wheel Width                                                            | 1-5/16 "                      |
| Wheel Bearing                                                          | Wheel With Plain Bearing      |
| Threaded Stem                                                          | 1/2 " -13                     |
| Threaded Size                                                          | 1 "                           |
| Offset                                                                 | 2-3/16 "                      |
| Swivel Interference                                                    | 10-3/8 "                      |
| Overall Height                                                         | 7-1/2 "                       |
| Swivel Radius                                                          | 3-1/8 "                       |
| Hardness Of Tread                                                      | 65±5° Shore D                 |
| Load Capacity (Dynamic)                                                | 198lbs                        |
| Load Capacity (Static)                                                 | 298lbs                        |
| Temperature                                                            | 14°F to +140°F                |
| Fork Type                                                              | Swivel Caster With Side Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 1.4lbs                        |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

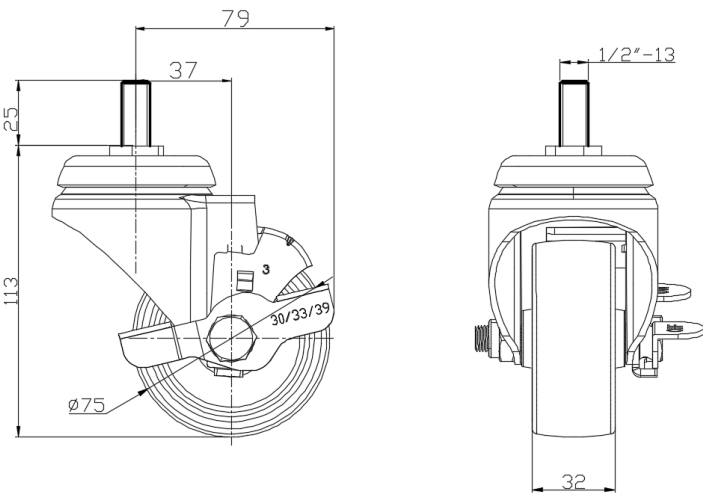

Mounting

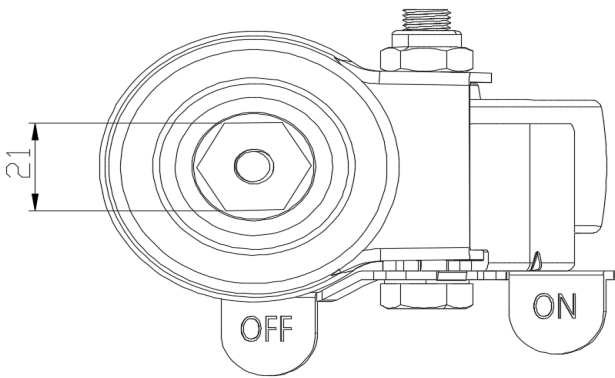

\* For any deviation between metric and imperial spec, please refer to the metric spec.