1111 Institutional Caster Series

Dersheng Casters Keep Rolling

Resolute (Gray deep gray) Wheel Diameter x Wheel Width 75 x 31mm

EAN


YJ-11110300459013

Swivel Caster, Single Bolthole Stamping Fork - Ø10.5 Extended control lever surface, Mounting Type - Threaded Stem device High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

	Imperial	\bigcirc	Metric
--	----------	------------	--------

Wheel Diameter 3 "

Wheel Width 1-1/4"

Wheel Bearing Wheels With Ball Bearings

Single Bolt HoleCentre Hole 3/8 "

Offset 1-1/2 "

Swivel Interference 6 "

Overall Height 4-5/16 "

Swivel Radius 3 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.3lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

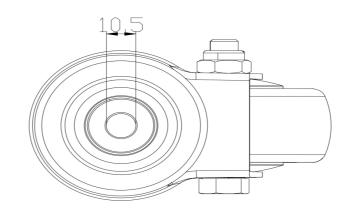

 $^{{}^{*}}$ For any deviation between metric and imperial spec, please refer to the metric spec.