1111 Institutional Caster Series



Rubber Wheel Diameter × Wheel Width 100 x 30.5mm


EAN

YJ-11110400062043

Swivel Caster, Top Plate Riveted Stamping Fork - high-grade hole Surface Zine-Plated, Mounting Type - Top Plate Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Wheel - Anti-thread wheel cover

Wheel Tread: high quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Swivel Radius

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 30.5mm

Wheel Bearing Wheel With Plain Bearing

95mm

Plate Size 95 x 72.5mm

Bolt Hole Spacing 75 x45mm

Plate Hole 11.3 x 8.8mm

Offset 43mm

Swivel Interference 190mm

Overall Height 137mm

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 80kgs
Load Capacity (Static) 120kgs

Temperature -20°C to +120°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.94kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • 0 0

Operating Noise


• • • • 0

Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions



Mounting

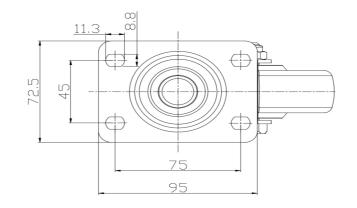

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.