1111 Institutional Caster Series

Dersheng Casters Keep Rolling

Phenolic (black) Wheel Diameter × Wheel Width 100 x 34mm

EAN

YJ-11110400252013

Swivel Caster, Top Plate Riveted Stamping Fork - high-grade hole Surface Zine-Plated, Mounting Type - Top Plate Wheel Tread And Wheel Center Made Of Compression Molded Phenolic Resin Filled With Macerated fabric Black, wheel - Anti-thread wheel cover.

80±5° Shore D

Tread: Compressed synthetic resin impregnated with fabric Wheel Center: Compressed synthetic resin impregnated with fabric

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheel With Plain Bearing

Plate Size 3-13/16 " x 2-7/8 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 3/8 "

Offset 1-3/4 "

Swivel Interference 7-1/2 "

Overall Height 5-1/2 "

Swivel Radius 3-13/16 "

Load Capacity (Dynamic) 298lbs

Load Capacity (Static) 446lbs

Temperature -4°F to +302°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.9lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

 \bullet 0 0 0


Floor Surface Preservation $\bullet \circ \circ \circ$

Dimensions





Mounting

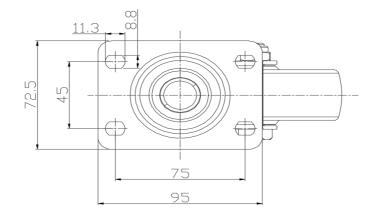

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.