1111 Institutional Caster Series

Dersheng Casters Keep Rolling

Rubber Wheel Diameter × Wheel Width 125 x 30.5mm

EAN

YJ-11110500062033

Swivel Casters, Top Plate Riveted Stamping Fork - European standard oblique hole Extended control lever surface, Mounting Type - Top Plate Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Wheel - middle tube type

Wheel Tread: high quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheel With Plain Bearing

Plate Size 4-1/8 " x 3-7/16 "

Bolt Hole Spacing

Plate Hole 3/4 " x 3/8 "

Offset 1-7/16 "

Swivel Interference 7-13/16 "

Overall Height 6-1/2 "

Swivel Radius 3-15/16 "

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +248°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.7lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • 0 0


Operating Noise

• • • • 0


Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions





Mounting

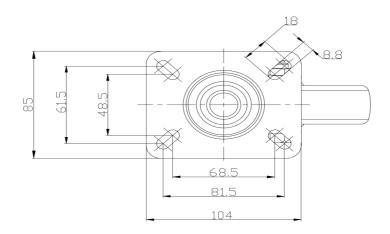

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.