1111 Institutional Caster Series

Dersheng Casters Keep Rolling

Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 125 x 31mm

EAN


YJ-11110500452053

Swivel Caster, Top Plate Riveted Stamping Fork - high-grade hole Surface Zine-Plated, Mounting Type - Top Plate High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread (Wheel Tread added thermoplastic shrink film protection) Pearl dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 72.5mm **Bolt Hole Spacing** 75 x45mm Plate Hole 11.3 x 8.8mm Offset 35.5mm Swivel Interference 98mm Overall Height 162mm **Swivel Radius** 98mm Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic)147kgsLoad Capacity (Static)220.5kgsTemperature-20°C to +60°CFork TypeSwivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.92kgs

Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

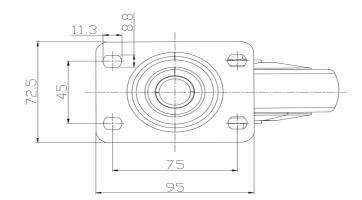

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.