1111 Institutional Caster Series



W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN

YJ-11110500454023

Swivel castor, Top Plate Riveted Stamping Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Surface Zine-Plated, Top Plate Mounting Type Reinforced impact-resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-13/16 " x 2-7/8 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 3/8 "

Offset 1-7/16 "

Swivel Interference 8-3/4 "

Overall Height 6-1/2 "

Swivel Radius 4-3/8 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 324lbs

Load Capacity (Static) 486lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight2.1lbsStandardISO22883

Advantages at a glance

Rolling Resistance


••••


Operating Noise

• • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

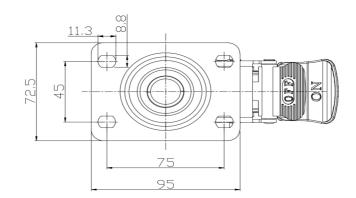

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.