



1117 Blue Fork Pneumatic Caster Series


Pneumatic (Black) Wheel Diameter × Wheel Width 216 x 65mm

YJ-11170800014071

Center Brake Locking system. Top Plate Riveted and Stamping. Blue-painted finish, Top Plate (5T) Mounting Type system. Cast Iron Wheel Center, High-Quality Resilient Rubber tread, Wheel Tread is both Compression Resistance and Abrasion Resistance. Black, Bearing—Ball Bearing.

Wheel surface: high-quality elastic rubber  
Wheel Center: iron core

Drawings are for reference only and may differ from the product

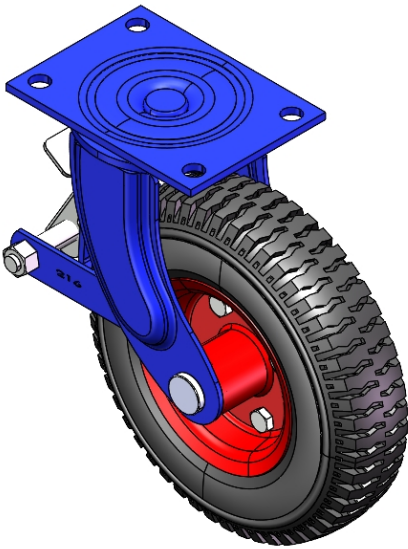

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                               |
| Wheel Diameter                                                         | 216mm                         |
| Wheel Width                                                            | 65mm                          |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 144 x 105mm                   |
| Bolt Hole Spacing                                                      | 120 x 75mm                    |
| Plate Hole                                                             | 13mm                          |
| Offset                                                                 | 63mm                          |
| Swivel Interference                                                    | 340mm                         |
| Overall Height                                                         | 252mm                         |
| Swivel Radius                                                          | 170mm                         |
| Hardness Of Tread                                                      | 75±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 100kgs                        |
| Load Capacity (Static)                                                 | 150kgs                        |
| Temperature                                                            | -20°C to +70°C                |
| Fork Type                                                              | Swivel Caster With Rear Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 3.14kgs                       |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

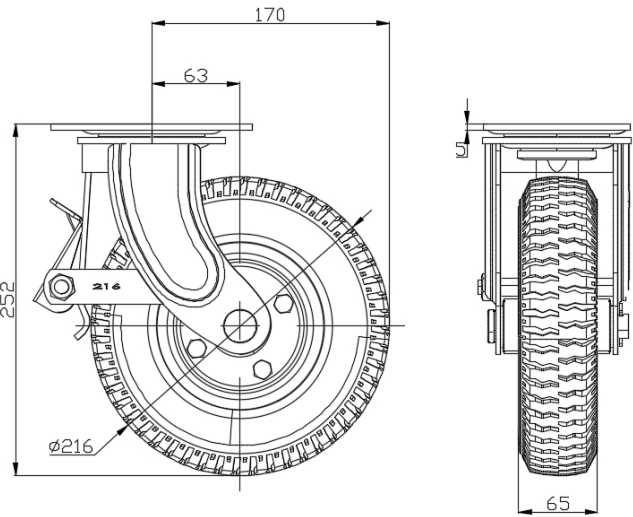

Mounting

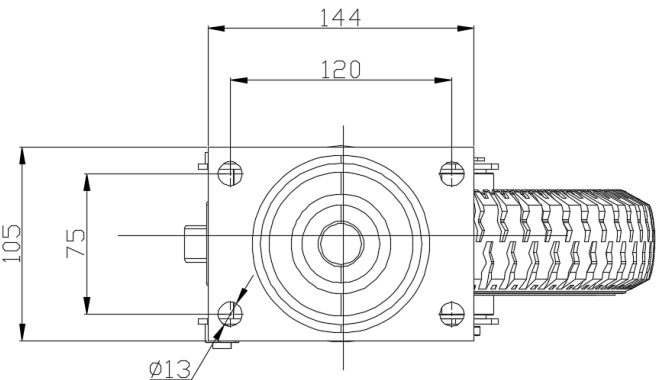

\* For any deviation between metric and imperial spec, please refer to the metric spec.