


1120 Single Raceway, Light Duty Caster Series

Rubber Wheel (Diameter x Width 40x17mm)

A

YJ-11200150061013

Rigid Casters, Stamping Fabricated Caster Fork, 36 x 15mm Bolt Hole Spacing Zinc-Plated surface, Mounting Type - Top Plate device Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Black, Bearing—Ball Bearings.

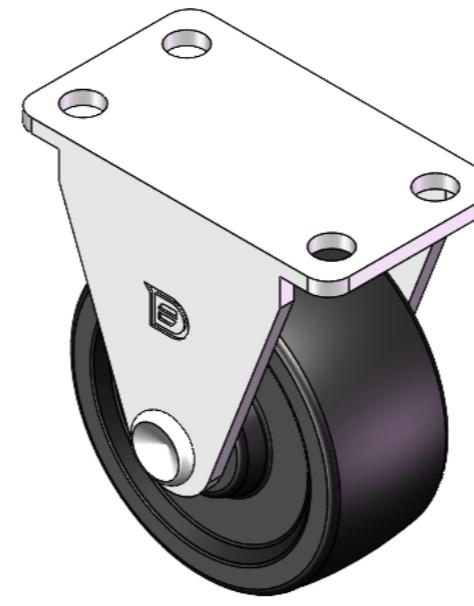

Wheel surface: High-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	40mm
Wheel Width	17mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	46 x 26mm
Bolt Hole Spacing	36 x 15mm
Plate Hole	5mm
Overall Height	51mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	20kgs
Load Capacity (Static)	30kgs
Temperature	-20°C to +120°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.07kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

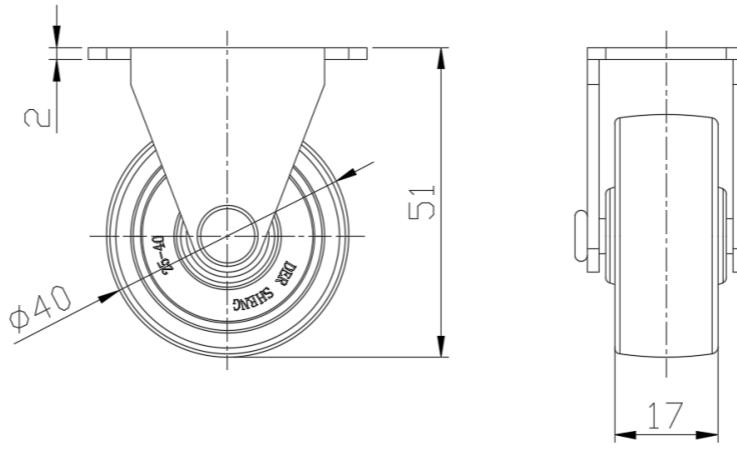

Mounting

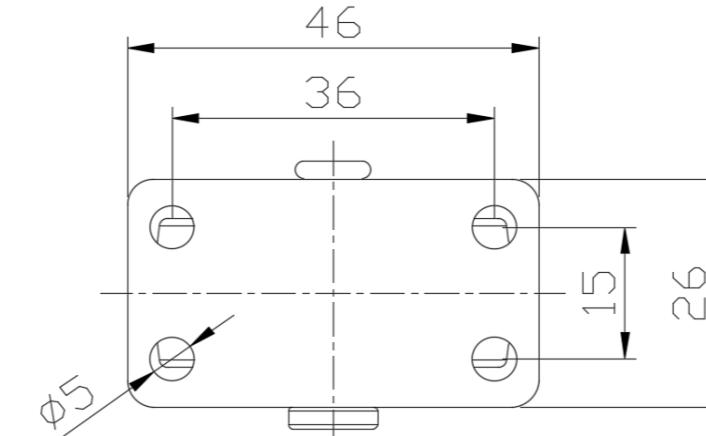

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com