


1120 Single Raceway, Light Duty Caster Series

Rubber Wheel (Diameter x Width 40x17mm)

A

YJ-11200150061013

Rigid Casters, Stamping Fabricated Caster Fork, 36 x 15mm Bolt Hole Spacing Zinc-Plated surface, Mounting Type - Top Plate device Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Black, Bearing—Ball Bearings.

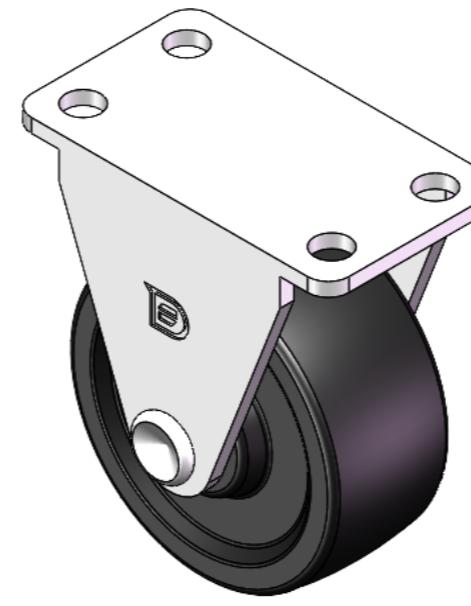

Wheel surface: High-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter 1-5/8

Wheel Width 11/16 "

Wheel Bearing Wheel With Plain Bearing

Plate Size 1-7/8 " x 1-1/16 "

Bolt Hole Spacing 1-7/16 " x 5/8 "

Plate Hole 1/4 "

Overall Height 1-15/16 "

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 44lbs

Load Capacity (Static) 66lbs

Temperature -4°F to +248°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.2lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

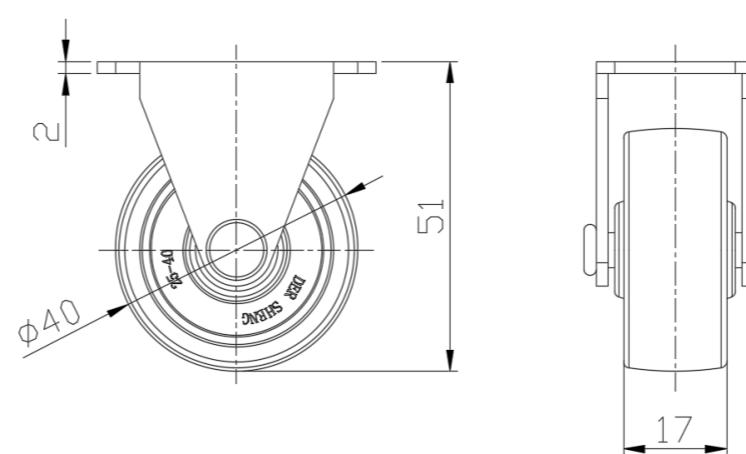

Mounting

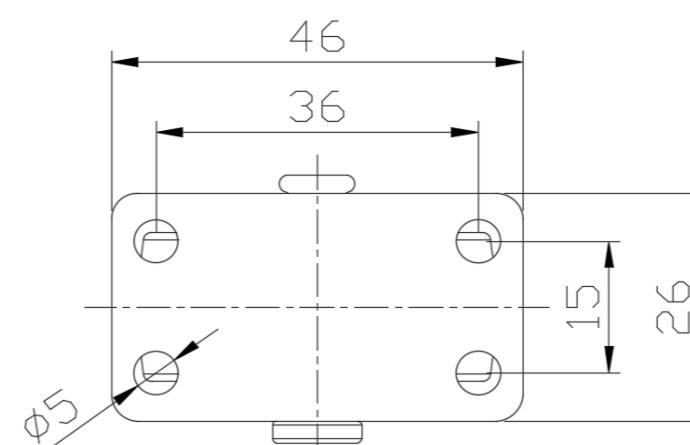

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com