

1120 Single Raceway, Light Duty Caster Series

Bánh MRC (màu trong suốt) Kích thước: Đường kính x Độ rộng 38x16.5mm


EAN

YJ-11200150291013

Rigid Casters, Stamping Fabricated Caster Fork, 36 x 15mm Bolt Hole Spacing Zinc-Plated surface, Mounting Type - Top Plate device Reinforced Polypropylene and Wheel Tread Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

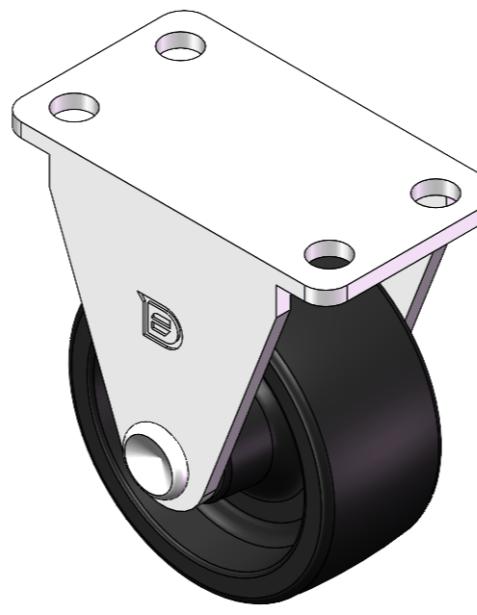

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 38mm

Wheel Width 16.5mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 46 x 26mm

Bolt Hole Spacing 36 x 15mm

Plate Hole 5mm

Overall Height 51mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 20kgs

Load Capacity (Static) 30kgs

Temperature -10°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.06kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • ○ ○

Floor Surface Preservation • • • ○ ○

Dimensions

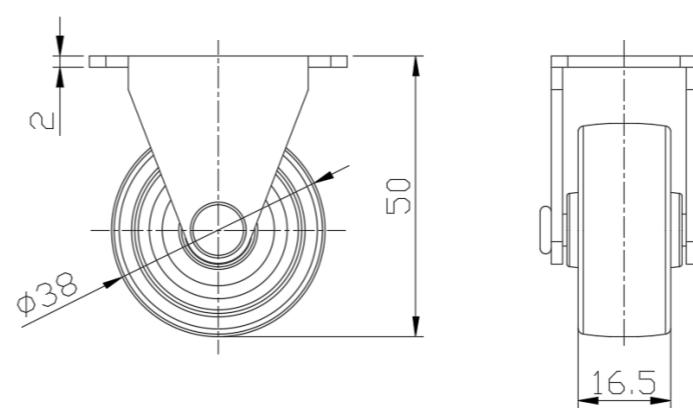

Mounting

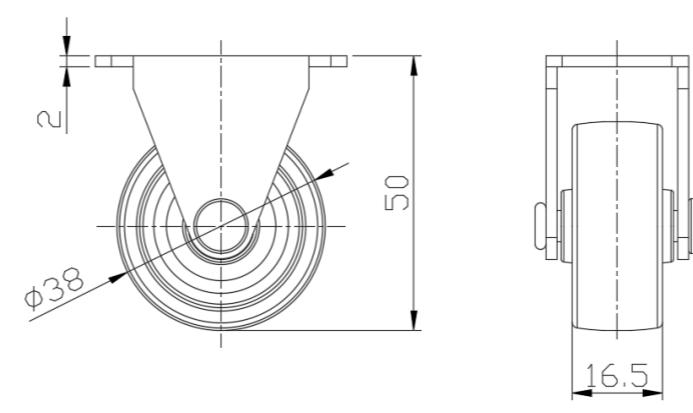

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com