

1120 Single Raceway, Light Duty Caster Series

PPR Wheel (White-Black Flat) Wheel Diameter × Wheel Width 50 x 22mm


A

YJ-11200200261013

Rigid Casters, Stamping Fabricated Caster Fork, 45 x 25mm Bolt Hole Spacing Zine-Plated surface, Mounting Type - Top Plate device Reinforced Polypropylene and Wheel Tread Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

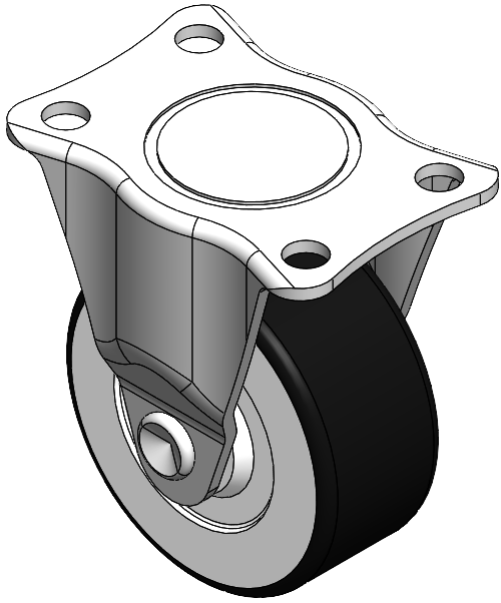

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	2 "
Wheel Width	7/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	2-5/16 " x 1-5/8 "
Bolt Hole Spacing	1-13/16
Plate Hole	1/4 "
Overall Height	2-5/8 "
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	110lbs
Load Capacity (Static)	165lbs
Temperature	-4°F to +140°F
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.2lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

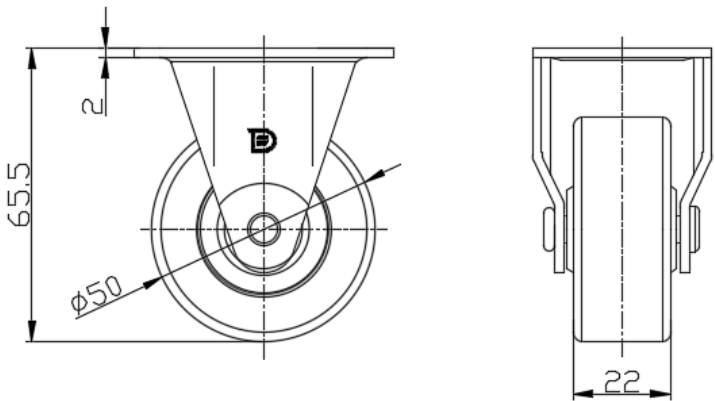

Mounting

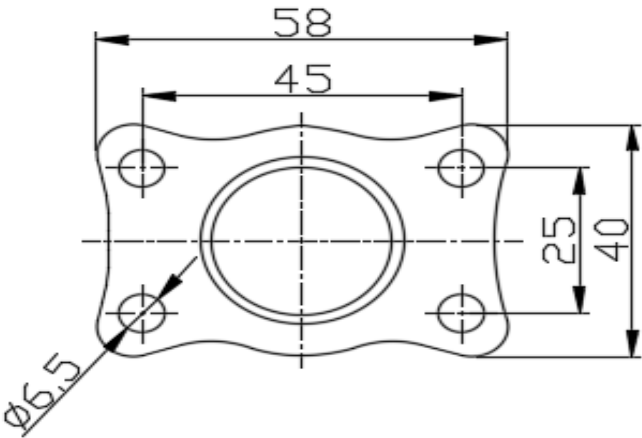

* For any deviation between metric and imperial spec, please refer to the metric spec.