

1121 Double Raceway, Light Duty Caster Series

Bánh MRC (màu trong suốt) Kích thước: Đường kính x Độ rộng 38x16.5mm


D

YJ-11210150072013

Swivel Casters, Riveted and Stamping Top Plate brackets—40x20mm Bolt Hole Spacing
 Zinc-Plated surface, Top Plate type (2T) Mounting Type device
 Reinforced Polypropylene and Wheel Tread
 Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

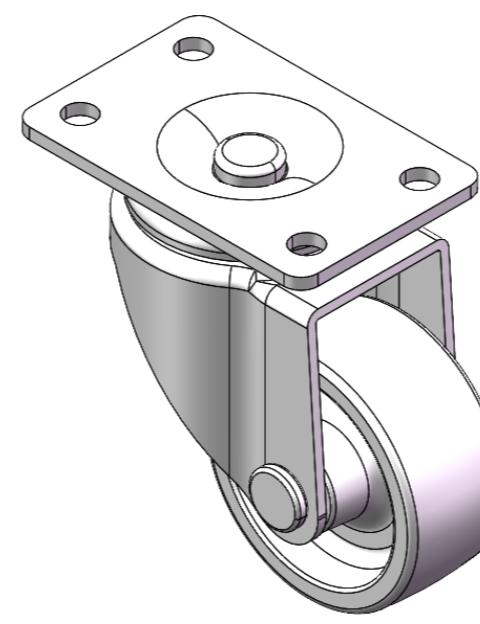

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 38mm

Wheel Width 16.5mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 51 x 31mm

Bolt Hole Spacing 40x20mm

Plate Hole 5mm

Offset 18.5mm

Swivel Interference 76mm

Overall Height 57mm

Swivel Radius 38mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 20kgs

Load Capacity (Static) 30kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.11kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

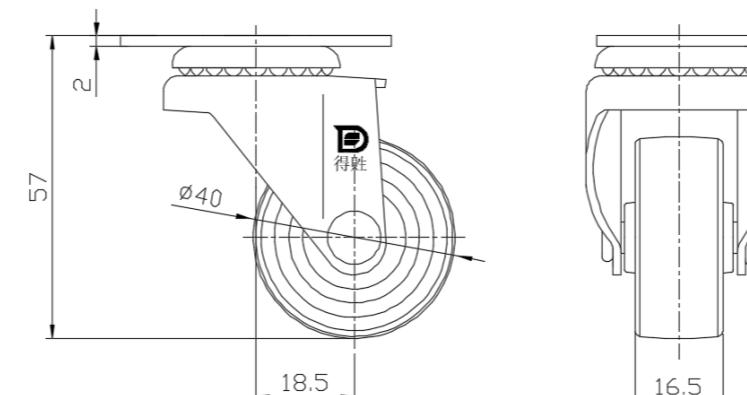

Mounting

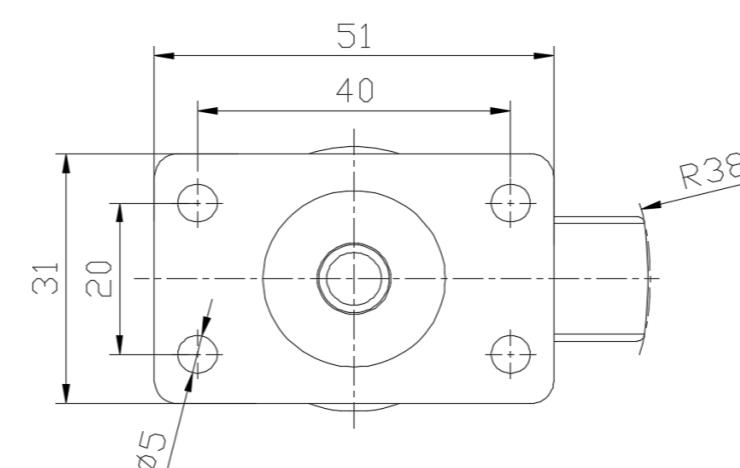

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com