

## 1121 Double Raceway, Light Duty Caster Series

Bánh MRC (màu trong suốt) Kích thước: Đường kính x Độ rộng 38x16.5mm


EAN

YJ-11210150076093

Equipped with side (wheel) brakes and a With locking system for the Casters.  
 Stamping, Riveted feet—M10-P1.5  
 Zinc-Plated surface, Mounting Type - Threaded Stem device  
 Reinforced Polypropylene and Wheel Tread  
 Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)  
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

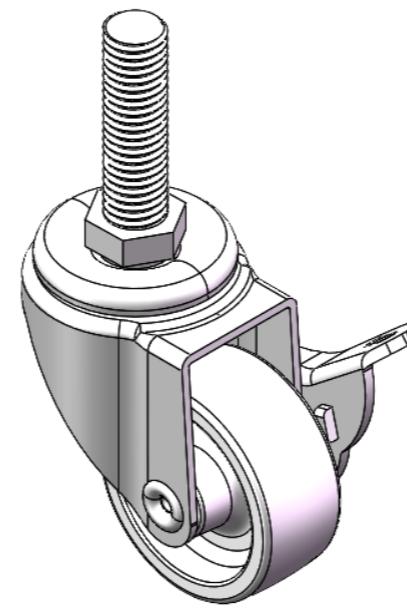

Picture may differ from original product

## Technical Data

Imperial  Metric

Wheel Diameter 1-1/2

Wheel Width 11/16 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M10-P1.5

Threaded Length 1-3/8 "

Offset 3/4 "

Swivel Interference 3-7/16 "

Overall Height 2-3/8 "

Swivel Radius 1-11/16 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 44lbs

Load Capacity (Static) 66lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.3lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

## Dimensions

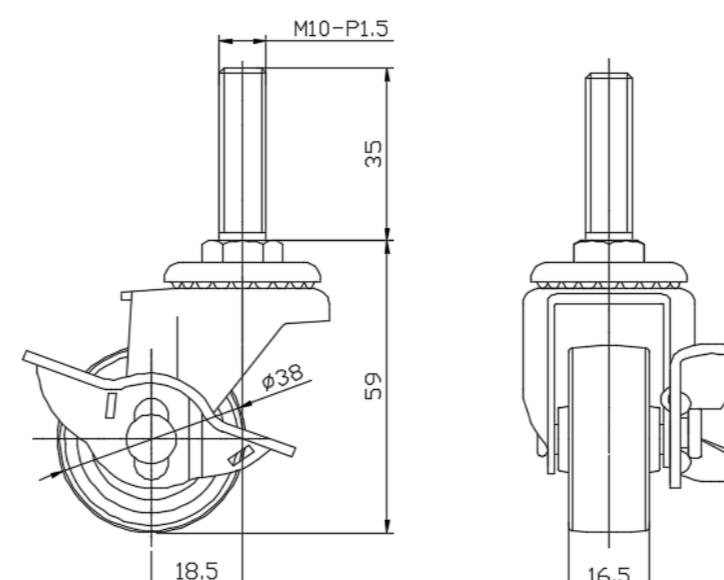

## Mounting

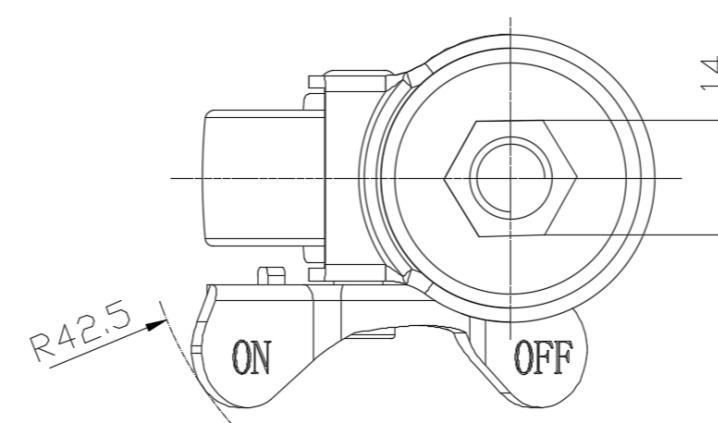

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 Dersheng International www.dersheng.com