


## 1121 Double Raceway, Light Duty Caster Series

PP (black) Wheel diameter x Wheel width 38x16.5 mm

EAN

YJ-11210150291023

Rigid Casters, Stamping Fabricated Caster Fork—40x20mm Bolt Hole Spacing Zinc-Plated surface, Mounting Type - Top Plate device Polypropylene Wheel Center and Wheel Tread Transparent, Bearing—Ball Bearings.

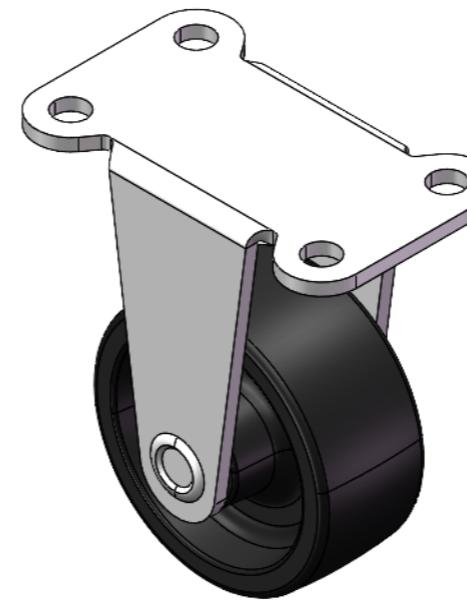

Wheel surface: PP polypropylene  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Metric  Imperial

Wheel Diameter 38mm

Wheel Width 16.5mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 51 x 31mm

Bolt Hole Spacing 40x20mm

Plate Hole 5mm

Overall Height 57mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 20kgs

Load Capacity (Static) 30kgs

Temperature -10°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.06kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • ○ ○

Floor Surface Preservation • • • ○ ○

## Dimensions

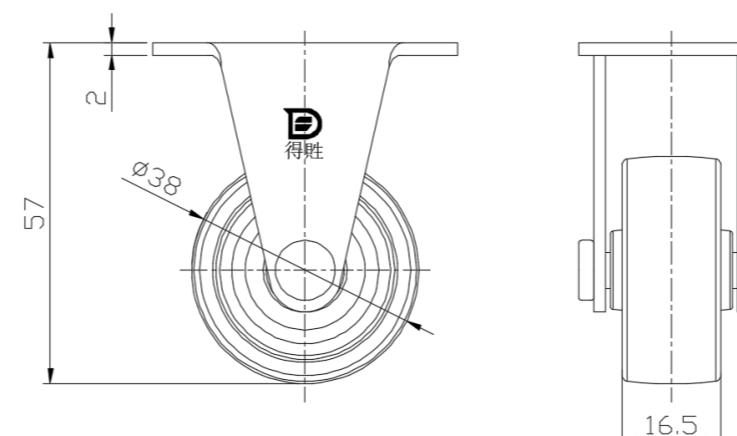

## Mounting

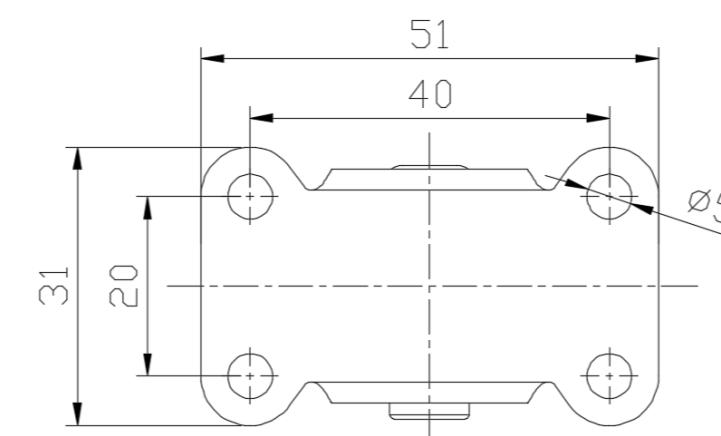

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com