

1121 Double Raceway, Light Duty Caster Series

Rubber wheel Wheel diameter × Wheel width 50×20 mm

EAN


YJ-11210200062013

Swivel Casters, Riveted and Stamping Top Plate—56x28mm Bolt Hole Spacing Zine-Plated surface, 2T Mounting Type - Top Plate device Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Black, Plain Bearings.

Wheel surface: High-quality elastic rubber

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

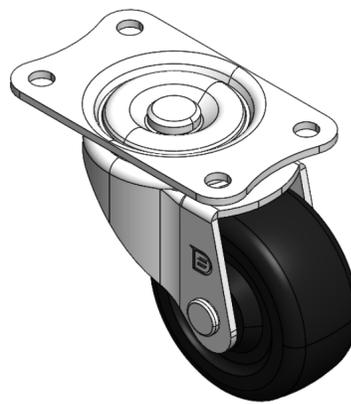

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	2 "
Wheel Width	13/16 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	2-13/16 " x 1-11/16 "
Bolt Hole Spacing	2-1/4 " x 1-1/8 "
Plate Hole	1/4 "
Offset	1 "
Swivel Interference	4 "
Overall Height	2-9/16 "
Swivel Radius	2 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	77lbs
Load Capacity (Static)	116lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.4lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

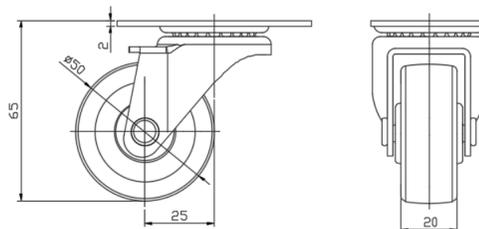

Mounting

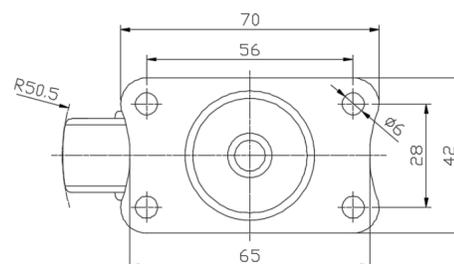

* For any deviation between metric and imperial spec, please refer to the metric spec.