

## 1121 Double Raceway, Light Duty Caster Series



Rubber wheel Wheel diameter × Wheel width 50×20 mm

EAN


YJ-11210200064013

Equipped with side (wheel) brakes and a With locking system for the Casters. Riveted and Stamping Top Plate legs—56x28mm Bolt Hole Spacing. Zine-Plated surface, Top Plate type (2T) Mounting Type device. Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread. Black, wheels—Plain Bearing.

Wheel surface: High-quality elastic rubber

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

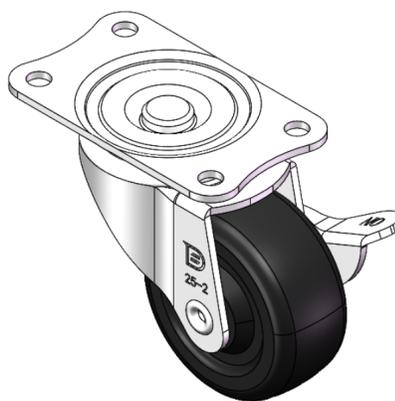

Picture may differ from original product

### Technical Data


Metric  Imperial

Wheel Diameter	50mm
Wheel Width	20mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	70 x 42mm
Bolt Hole Spacing	56x28mm
Plate Hole	6mm
Offset	25mm
Swivel Interference	113mm
Overall Height	65mm
Swivel Radius	56.5mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	35kgs
Load Capacity (Static)	52.5kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.20kgs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

### Dimensions

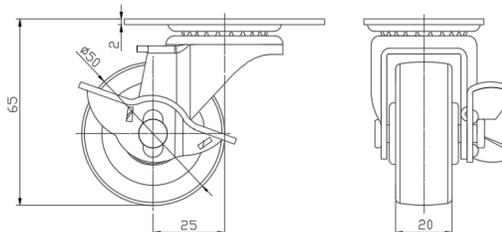

### Mounting

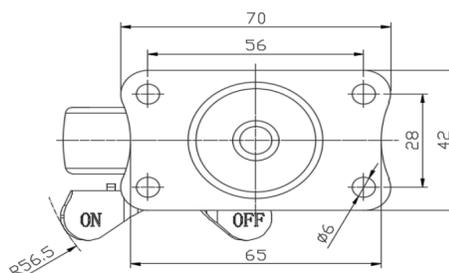

\* For any deviation between metric and imperial spec, please refer to the metric spec.