

## 1121 Double Raceway, Light Duty Caster Series



Rubber wheel Wheel diameter × Wheel width 50×20 mm

EAN


YJ-11210200064013

Equipped with side (wheel) brakes and a With locking system for the Casters. Riveted and Stamping Top Plate legs—56x28mm Bolt Hole Spacing. Zine-Plated surface, Top Plate type (2T) Mounting Type device. Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread. Black, wheels—Plain Bearing.

Wheel surface: High-quality elastic rubber

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

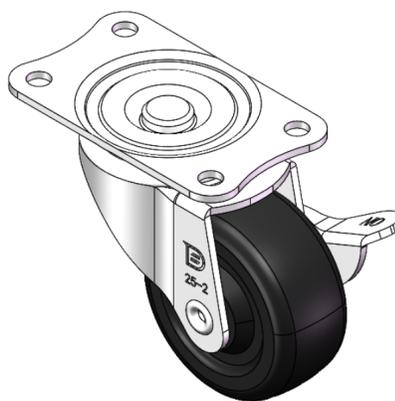

Picture may differ from original product

### Technical Data


Imperial  Metric

Wheel Diameter	2 "
Wheel Width	13/16 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	2-13/16 " x 1-11/16 "
Bolt Hole Spacing	2-1/4 " x 1-1/8 "
Plate Hole	1/4 "
Offset	1 "
Swivel Interference	4-1/2 "
Overall Height	2-9/16 "
Swivel Radius	2-1/4 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	77lbs
Load Capacity (Static)	116lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.4lbs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

### Dimensions

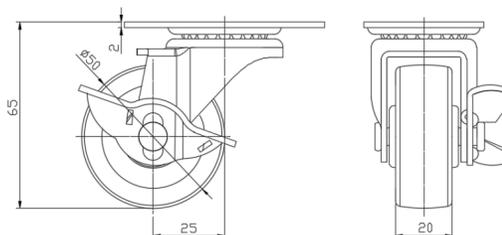

### Mounting

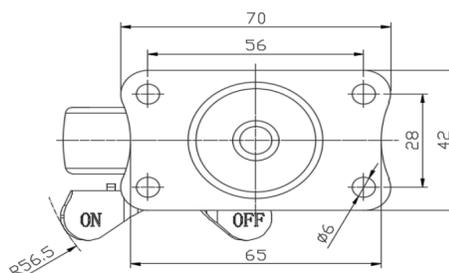

\* For any deviation between metric and imperial spec, please refer to the metric spec.