

## 1121 Double Raceway, Light Duty Caster Series

Rubber wheel Wheel diameter × Wheel width 50×20 mm


EAN

YJ-11210200066013

Equipped with side (wheel) brakes and a With locking system for the Casters.  
 Stamping, Threaded Stem feet—M8-P1.25  
 Zine-Plated surface, Mounting Type - Threaded Stem hardware  
 Reinforced Polypropylene, High-Quality Resilient Rubber rim  
 Black, Plain Bearings.

Wheel surface: High-quality elastic rubber  
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

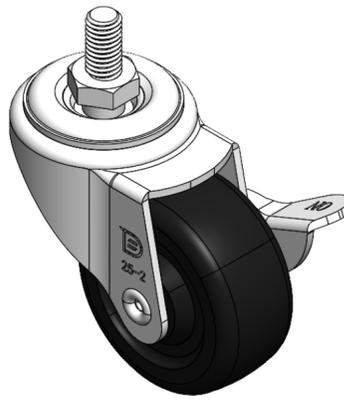

Picture may differ from original product

### Technical Data


Metric  Imperial

Wheel Diameter	50mm
Wheel Width	20mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M8-P1.25
Threaded Length	15mm
Offset	25mm
Swivel Interference	113mm
Overall Height	68mm
Swivel Radius	56.5mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	35kgs
Load Capacity (Static)	52.5kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.20kgs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

### Dimensions

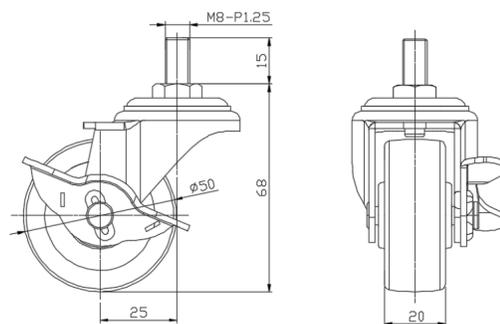

### Mounting

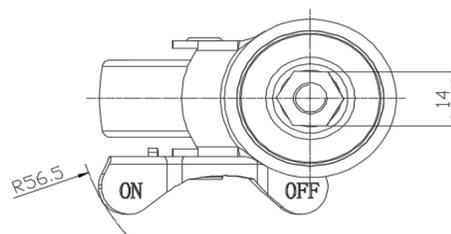

\* For any deviation between metric and imperial spec, please refer to the metric spec.