

1121 Double Raceway, Light Duty Caster Series

Rubber wheel Wheel diameter × Wheel width 50×20 mm


EAN

YJ-11210200066123

Equipped with side (wheel) brakes and a With locking system for the Casters.
 Stamping, Threaded Stem feet—M10-P1.5
 Zine-Plated surface, Mounting Type - Threaded Stem device
 Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread
 Black, wheels—Plain Bearing.

Wheel surface: High-quality elastic rubber
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

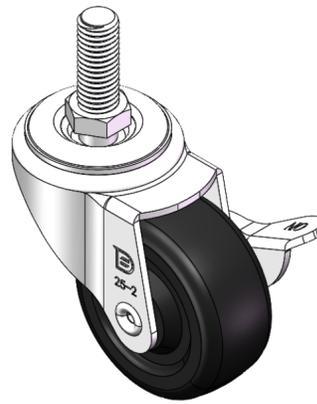

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	50mm
Wheel Width	20mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M10-P1.5
Threaded Length	25mm
Offset	25mm
Swivel Interference	113mm
Overall Height	68mm
Swivel Radius	56.5mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	35kgs
Load Capacity (Static)	52.5kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.19kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

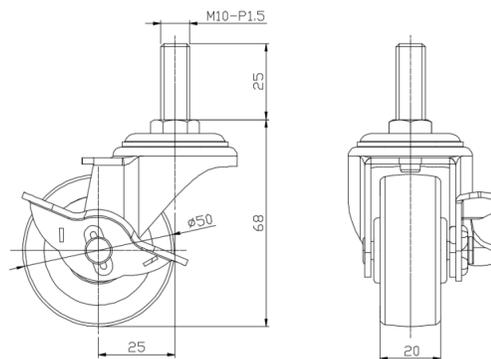

Mounting

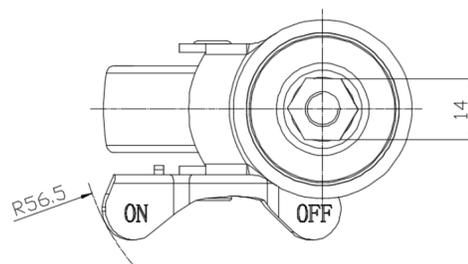

* For any deviation between metric and imperial spec, please refer to the metric spec.