

## 1121 Double Raceway, Light Duty Caster Series

Rubber wheel Wheel diameter × Wheel width 50×20 mm


EAN

YJ-11210200066123

Equipped with side (wheel) brakes and a With locking system for the Casters.  
 Stamping, Threaded Stem feet—M10-P1.5  
 Zine-Plated surface, Mounting Type - Threaded Stem device  
 Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread  
 Black, wheels—Plain Bearing.

Wheel surface: High-quality elastic rubber  
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

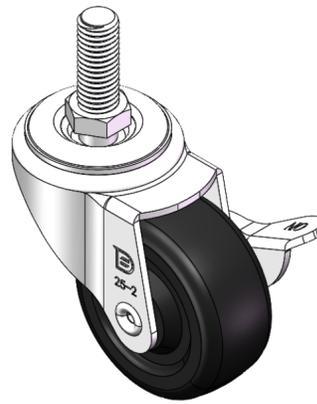

Picture may differ from original product

### Technical Data


Imperial  Metric

Wheel Diameter	2 "
Wheel Width	13/16 "
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M10-P1.5
Threaded Length	1 "
Offset	1 "
Swivel Interference	4-1/2 "
Overall Height	2-9/16 "
Swivel Radius	2-1/4 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	77lbs
Load Capacity (Static)	116lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.4lbs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

### Dimensions

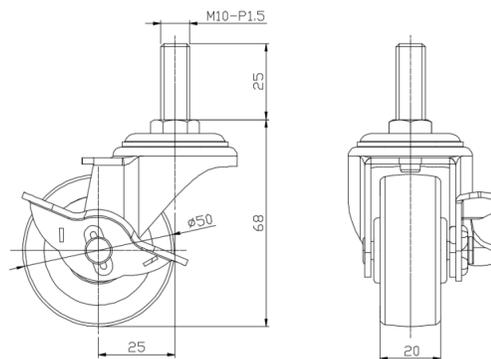

### Mounting

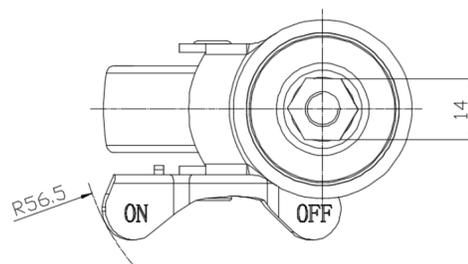

\* For any deviation between metric and imperial spec, please refer to the metric spec.