

1121 Double Raceway, Light Duty Caster Series

Rubber wheel Wheel diameter × Wheel width 50×20 mm


EAN

YJ-11210200066913

Equipped with side (wheel) brakes and a With locking system. Stamping, Threaded Stem feet—3/8"-16 teeth. Zine-Plated surface, Mounting Type - Threaded Stem. Reinforced Polypropylene Wheel Center, High-Quality Resilient Rubber rim. Black, Plain Bearings.

Wheel surface: High-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

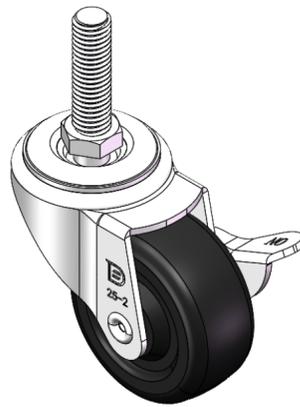

Picture may differ from original product

Technical Data


Metric Imperial

| | |
|-------------------------|-------------------------------|
| Wheel Diameter | 50mm |
| Wheel Width | 20mm |
| Wheel Bearing | Wheel With Plain Bearing |
| Threaded Stem | 3/8 " -16牙 |
| Threaded Length | 34mm |
| Offset | 25mm |
| Swivel Interference | 113mm |
| Overall Height | 68mm |
| Swivel Radius | 56.5mm |
| Hardness Of Tread | 80±5° Shore A |
| Load Capacity (Dynamic) | 35kgs |
| Load Capacity (Static) | 52.5kgs |
| Temperature | -20°C to +120°C |
| Fork Type | Swivel Caster With Side Brake |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 0.21kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-------------|
| Rolling Resistance | ● ● ● ● ○ ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

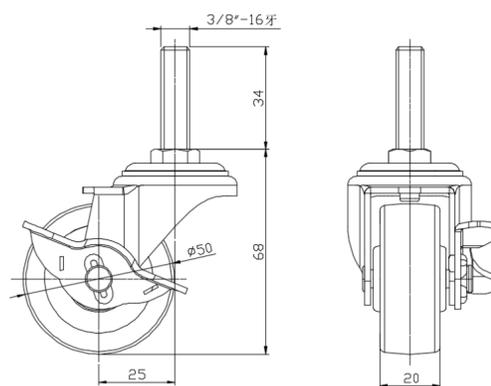

Mounting

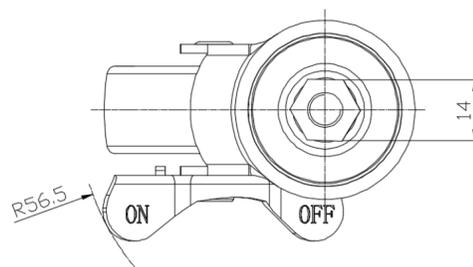

* For any deviation between metric and imperial spec, please refer to the metric spec.