

## 1121 Double Raceway, Light Duty Caster Series

PP (black) Wheel diameter × Wheel width 50×21 mm

EAN


YJ-11210200072013

Equipped with side (wheel) brakes and a With locking system for the Casters.  
 Stamping, Threaded Stem feet with Riveted cores—M8-P1.25  
 Zine-Plated surface, Mounting Type - Threaded Stem device  
 Reinforced Polypropylene and Wheel Tread  
 Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

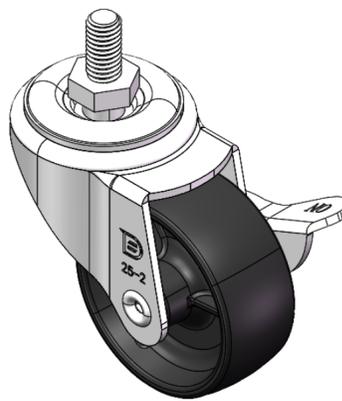

Picture may differ from original product

### Technical Data


Imperial  Metric

Wheel Diameter	2 "
Wheel Width	7/8 "
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M8-P1.25
Threaded Length	5/8 "
Offset	1 "
Swivel Interference	4-1/2 "
Overall Height	2-9/16 "
Swivel Radius	2-1/4 "
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	77lbs
Load Capacity (Static)	116lbs
Temperature	14°F to +140°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.3lbs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

### Dimensions

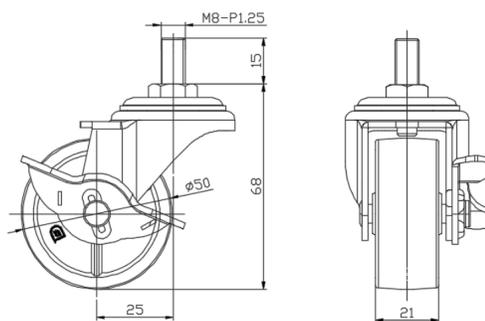

### Mounting

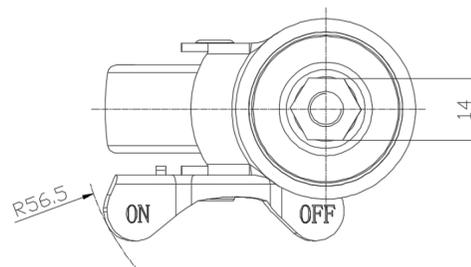

\* For any deviation between metric and imperial spec, please refer to the metric spec.