

1121 Double Raceway, Light Duty Caster Series

Rubber wheel Wheel diameter × Wheel width 50×20 mm

EAN


YJ-11210200075203

Equipped with side (wheel) brakes and a With locking system for the Casters.
 Stamping, Threaded Stem feet with Riveted cores—M12-P1.75
 Zine-Plated surface, Mounting Type - Threaded Stem device
 Reinforced Polypropylene and Wheel Tread
 Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

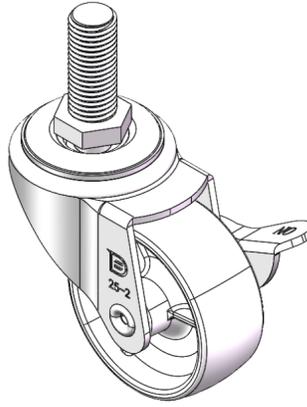

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	50mm
Wheel Width	22mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M12-P1.75
Threaded Length	25mm
Offset	25mm
Swivel Interference	113mm
Overall Height	68mm
Swivel Radius	56.5mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	40kgs
Load Capacity (Static)	60kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.17kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

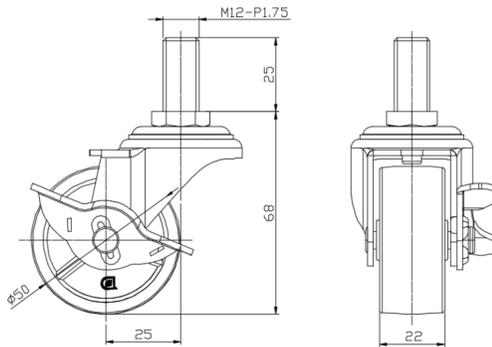

Mounting

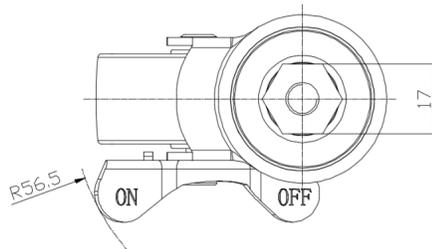

* For any deviation between metric and imperial spec, please refer to the metric spec.