

1121 Double Raceway, Light Duty Caster Series

MRC Wheel (Transparent) Diameter × Width 50×22mm

EAN


YJ-11210200076153

Equipped with side (wheel) brakes and a With locking system for the Casters. Stamping feet with Riveted cores—3/8"-16 teeth.
Zine-Plated surface, Mounting Type - Threaded Stem.
Reinforced Polypropylene Wheel Center and rim.
Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

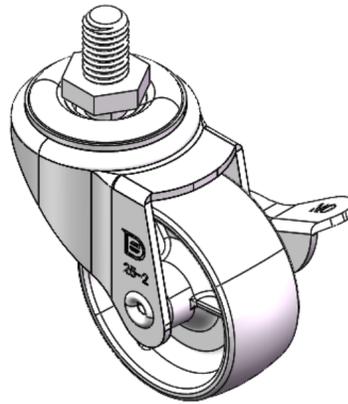

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	50mm
Wheel Width	22mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	3/8" -16牙
Threaded Length	15mm
Offset	25mm
Swivel Interference	113mm
Overall Height	68mm
Swivel Radius	56.5mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	40kgs
Load Capacity (Static)	60kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.15kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

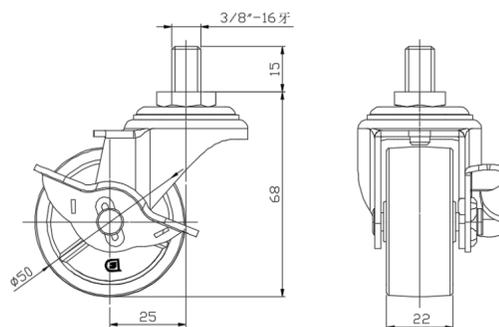

Mounting

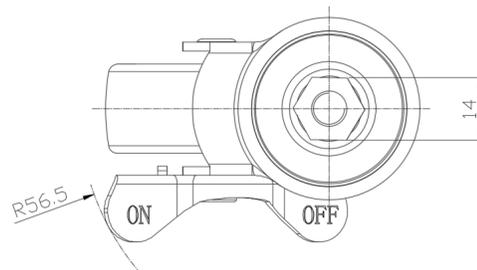

* For any deviation between metric and imperial spec, please refer to the metric spec.