

1121 Double Raceway, Light Duty Caster Series

PPR Wheel (Gray-Gray Arc) Wheel Diameter × Wheel Width 51.5 x 21mm

EAN


YJ-11210200264023

Equipped with side (wheel) brakes and a With locking system for the Casters. Riveted and Stamping Top Plate legs—56x28mm Bolt Hole Spacing.
Zinc-Plated surface, 2T Mounting Type - Top Plate device.
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.
Pearl gray finish, Plain Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

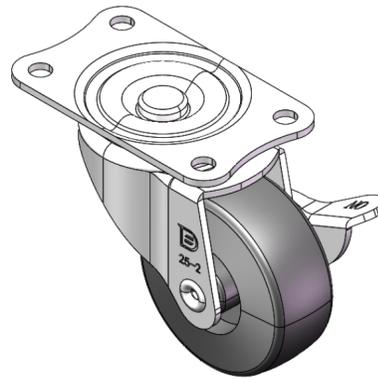

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	51.5mm
Wheel Width	21mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	70 x 42mm
Bolt Hole Spacing	56x28mm
Plate Hole	6mm
Offset	25mm
Swivel Interference	113mm
Overall Height	66mm
Swivel Radius	56.5mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	30kgs
Load Capacity (Static)	45kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.18kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

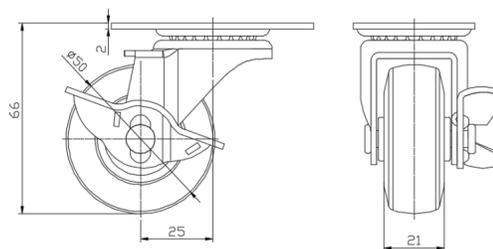

Mounting

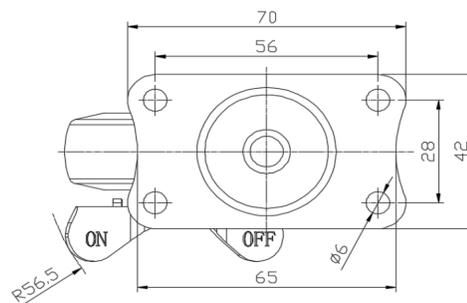

* For any deviation between metric and imperial spec, please refer to the metric spec.