

1121 Double Raceway, Light Duty Caster Series

PPR Wheel (Gray-Gray Arc) Wheel Diameter × Wheel Width 51.5 x 21mm

EAN


YJ-11210200264023

Equipped with side (wheel) brakes and a With locking system for the Casters. Riveted and Stamping Top Plate legs—56x28mm Bolt Hole Spacing.
Zinc-Plated surface, 2T Mounting Type - Top Plate device.
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.
Pearl gray finish, Plain Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

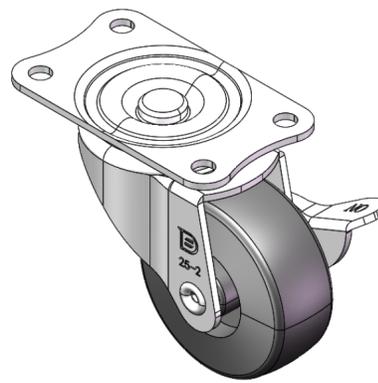

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	2-1/32 "
Wheel Width	7/8 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	2-13/16 " x 1-11/16 "
Bolt Hole Spacing	2-1/4 " x 1-1/8 "
Plate Hole	1/4 "
Offset	1 "
Swivel Interference	4-1/2 "
Overall Height	2-5/8 "
Swivel Radius	2-1/4 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	66lbs
Load Capacity (Static)	99lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.4lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

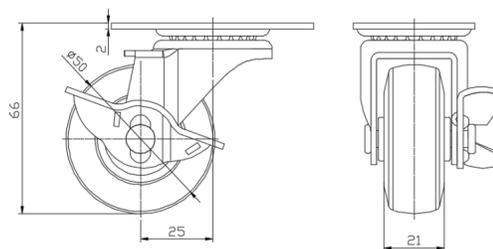

Mounting

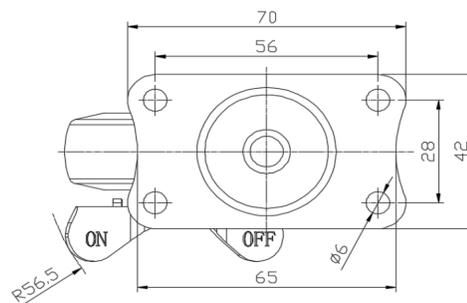

* For any deviation between metric and imperial spec, please refer to the metric spec.