

1121 Double Raceway, Light Duty Caster Series

PP (black) Wheel diameter × Wheel width 50×21 mm

EAN


YJ-11210200295033

Portable Casters, Threaded Stem Stamping Fork—M8-P1.25
Zinc-Plated surface, Mounting Type - Threaded Stem device
Reinforced Polypropylene Wheel Center and Wheel Tread
Black, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

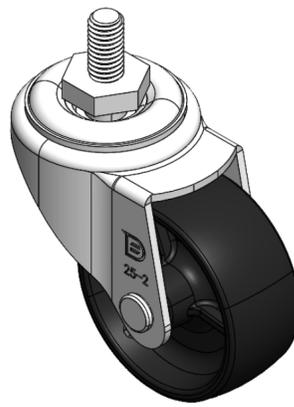

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	50mm
Wheel Width	21mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M8-P1.25
Threaded Length	15mm
Offset	25mm
Swivel Interference	102mm
Overall Height	68mm
Swivel Radius	50.5mm
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	35kgs
Load Capacity (Static)	52.5kgs
Temperature	-10°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.13kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

Dimensions

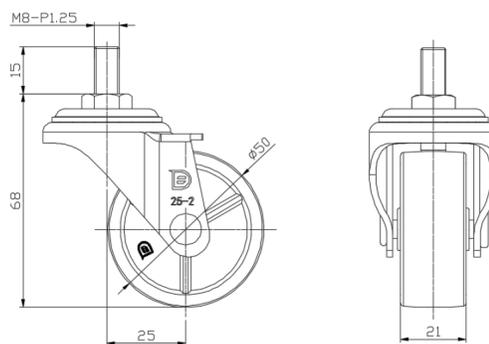

Mounting

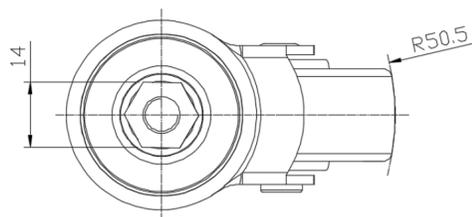

* For any deviation between metric and imperial spec, please refer to the metric spec.