



1121 Double Raceway, Light Duty Caster Series

Rubber Wheel Diameter × Wheel Width 100 × 27mm


EAN

YJ-11210400064023

Side Brake Locking system Top Plate with Riveted Fork - Bolt Hole Spacing 82 x 40 Zine-Plated, Top Plate Mounting Type Reinforced Polypropylene with High-Quality Resilient Rubber tread Wheels - Plain Bearing

Wheel Tread: high-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

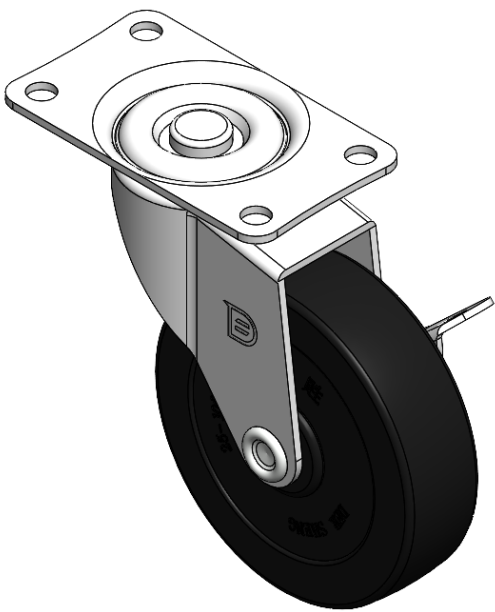

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	4 "
Wheel Width	1-1/16 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	4 " x 2-5/16 "
Bolt Hole Spacing	3-5/16 " x 1-5/8 "
Plate Hole	3/8 "
Offset	1-3/4 "
Swivel Interference	7-1/2 "
Overall Height	5 "
Swivel Radius	3-3/4 "
Hardness Of Tread	95±5° Shore A
Load Capacity (Dynamic)	176lbs
Load Capacity (Static)	265lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.5lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

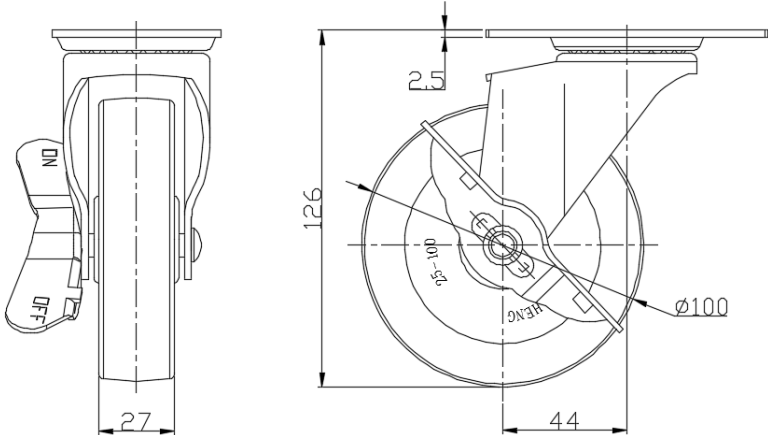

Mounting

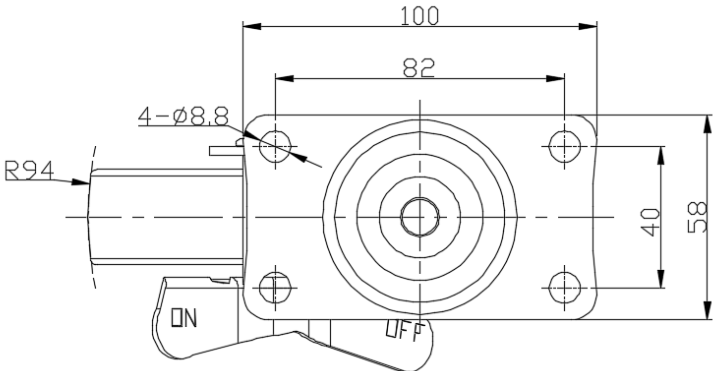

* For any deviation between metric and imperial spec, please refer to the metric spec.