



1121 Double Raceway, Light Duty Caster Series

Rubber Wheel Diameter × Wheel Width 100 x 24mm


EAN

YJ-11210400064713

Casters with Total Brakes and With locking system. Top Plate Riveted and Stamping 72 x 53.5mm (2-7/8" x 2-1/8") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Reinforced Polypropylene Wheel Center with High-Quality Resilient Rubber Wheel Tread. Bearing - Plain Bearing

Wheel surface: high-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

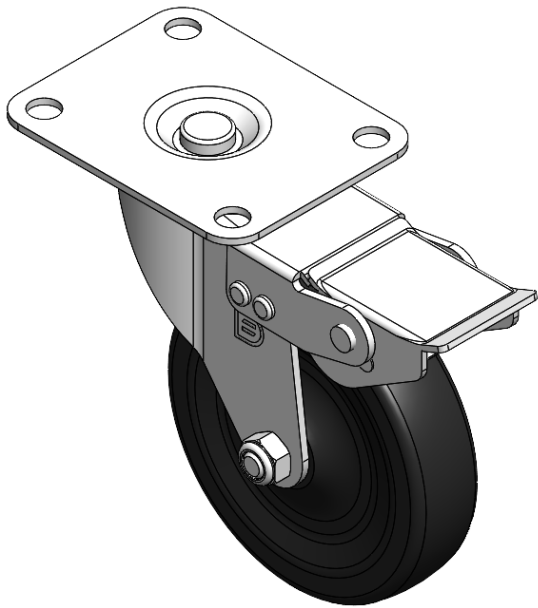

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	100mm
Wheel Width	24mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	92 x 73mm
Bolt Hole Spacing	72 x 53mm
Plate Hole	10mm
Offset	44mm
Swivel Interference	212mm
Overall Height	128mm
Swivel Radius	106mm
Hardness Of Tread	95±5° Shore A
Load Capacity (Dynamic)	80kgs
Load Capacity (Static)	120kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.69kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

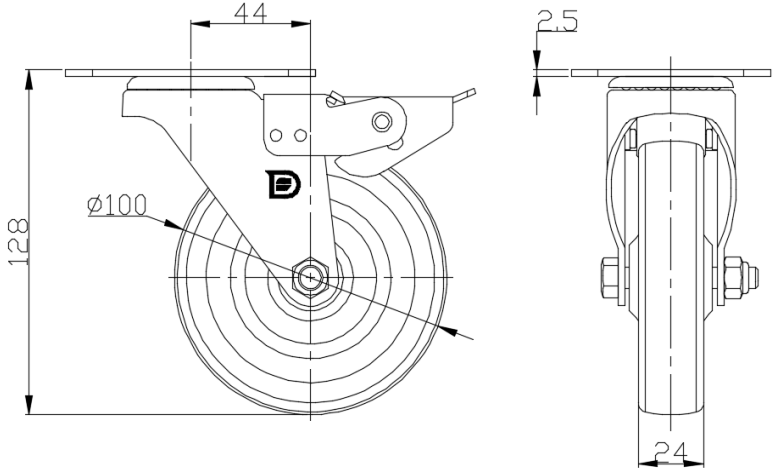

Mounting

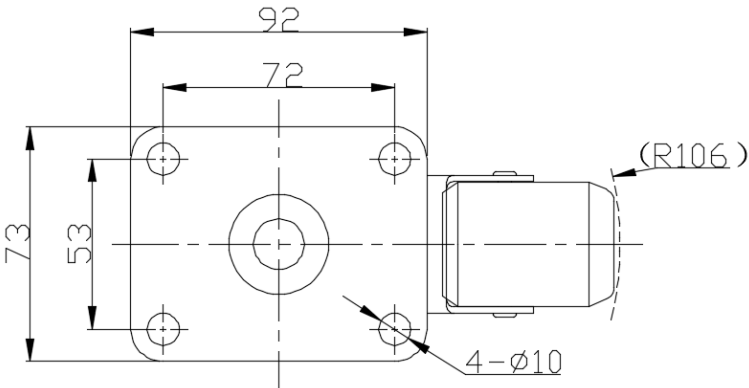

* For any deviation between metric and imperial spec, please refer to the metric spec.