

1121 Double Raceway, Light Duty Caster Series



Rubber wheel Wheel diameter × Wheel width 125×27 mm

EAN

YJ-11210500062033

Swivel Casters, Riveted and Stamping Top Plate—82x40.5mm Bolt Hole Spacing Zine-Plated surface, Top Plate type (2.5T) Mounting Type device Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Black, wheels—Plain Bearing.

Wheel surface: High-quality elastic rubber

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	125mm
Wheel Width	27mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	100 x 58mm
Bolt Hole Spacing	82 x 40.5mm
Plate Hole	8.8mm
Offset	40mm
Swivel Interference	202mm
Overall Height	149mm
Swivel Radius	101mm
Hardness Of Tread	95±5° Shore A
Load Capacity (Dynamic)	90kgs
Load Capacity (Static)	135kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.85kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

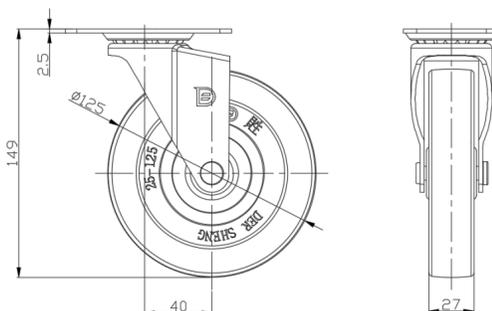

Mounting

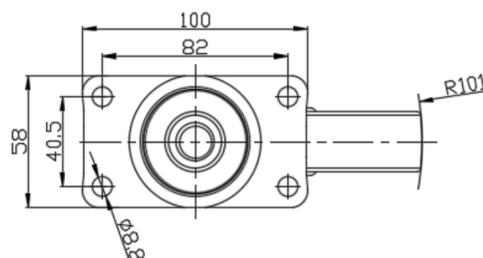

* For any deviation between metric and imperial spec, please refer to the metric spec.