

1121 Double Raceway, Light Duty Caster Series



Rubber wheel Wheel diameter × Wheel width 125×27 mm

EAN

YJ-11210500062033

Swivel Casters, Riveted and Stamping Top Plate—82x40.5mm Bolt Hole Spacing Zine-Plated surface, Top Plate type (2.5T) Mounting Type device Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Black, wheels—Plain Bearing.

Wheel surface: High-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	5 "
Wheel Width	1-1/16 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	4 " x 2-5/16 "
Bolt Hole Spacing	3-3/16 x 1-5/8
Plate Hole	3/8 "
Offset	1-5/8 "
Swivel Interference	8 "
Overall Height	6 "
Swivel Radius	4 "
Hardness Of Tread	95±5° Shore A
Load Capacity (Dynamic)	198lbs
Load Capacity (Static)	298lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.9lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

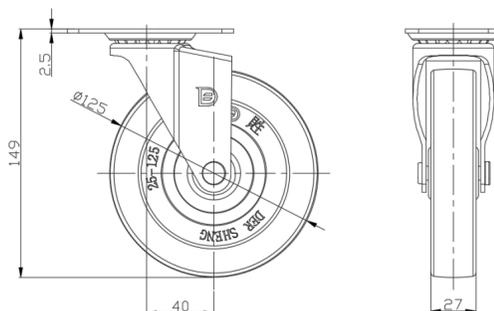

Mounting

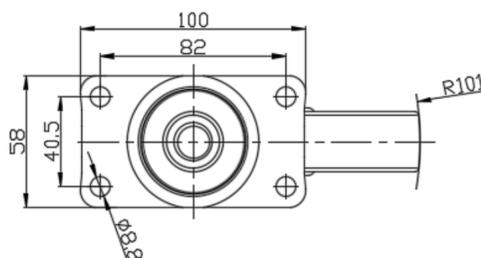

* For any deviation between metric and imperial spec, please refer to the metric spec.