1124 1-1/2" Wide General Purposes Caster Series



NBR (Tangerine) Wheel Diameter x Wheel Width 100 × 37mm

EAN


YJ-11240400042043

Swivel Caster, Top Plate Riveted and Stamping with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Mounting Type. Zine-Plated, Top Plate (4.5T) Mounting Type mechanism. Cast Iron Wheel Center, High-Quality Resilient Rubber tread. Orange color, Bearing—Ball Bearing.

Wheel Tread: high-quality elastic rubber

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-1/2 "

Wheel Bearing Wheels With Ball Bearings

4-9/16" x 4" Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 13/16 " x 3/8 " Plate Hole 1-3/16 " Offset 6-3/8 " Swivel Interference 5-5/8 " Overall Height 3-3/16 " **Swivel Radius** Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 331lbs

Load Capacity (Static) 496lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 4.4lbs

Standard ISO22883


Advantages at a glance

Floor Surface Preservation • • • • ○

Dimensions

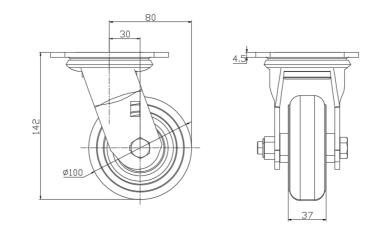

Mounting

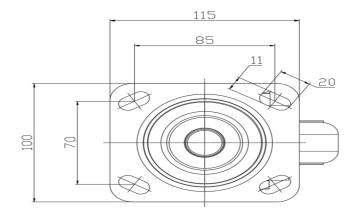

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.