1124 1-1/2" Wide General Purposes Caster Series



MRC (Transparent) Wheel Diameter × Wheel Width 100 x 32mm


EAN

YJ-11240400072023

Swivel Caster, Top Plate Riveted Stamping Fork - D-type hole Surface Zine-Plated, Top Plate type (4.5T) Mounting Type device Reinforced Polypropylene and Wheel Tread Transparent, Bearing - Ball Bearing.

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-5/16 "

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole Offset 1-3/16 " 6-3/8 " Swivel Interference 5-5/8 " Overall Height 3-3/16 " **Swivel Radius** Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 661lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.2lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions



Mounting

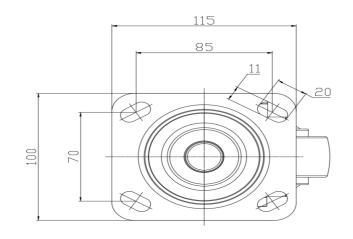

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.