

# 1124 1-1/2" Wide General Purposes Caster Series




MRC (Transparent) Wheel Diameter × Wheel Width 100 x 32mm

EAN

YJ-11240400074043

Side (wheel) brake type, Locking system Caster. Top Plate Riveted Stamping Fork - D type Hole Surface Zine-Plated, Top Plate type (4.5T) installation device Cast Iron Wheel Center, High-Quality Resilient Rubber Wheel Tread Transparent, Bearing - Ball Bearing.



Wheel tread: Thermoplastic (PA6)  
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


Metric  Imperial

Wheel Diameter	100mm
Wheel Width	32mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	30mm
Swivel Interference	160mm
Overall Height	142mm
Swivel Radius	80mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	200kgs
Load Capacity (Static)	300kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.62kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

## Dimensions

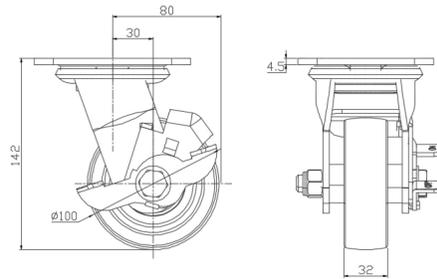

## Mounting

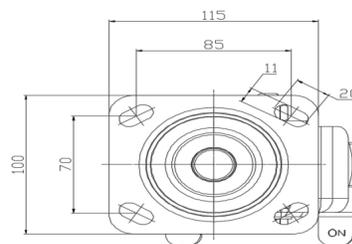

\* For any deviation between metric and imperial spec, please refer to the metric spec.