1124 1-1/2" Wide General Purposes Caster Series



PU (Black flat) Wheel Diameter x Wheel Width 100 × 34mm

EAN


YJ-11240400334613

Side (wheel) brake Caster with Locking system. Top Plate Riveted and Stamping Forkplate – D-shaped hole Zine-Plated, Top Plate (4.5T) Mounting Type system Cast Iron Wheel Center with High Quality Polyurethane tread Iron black, Bearing – Ball Bearing

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

4-9/16" x 4" Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 9/16 " x 3/8 " Plate Hole Offset 1-3/16 " 6-3/8 " Swivel Interference 5-5/8 " Overall Height 3-3/16 " **Swivel Radius** Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 661lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.7lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

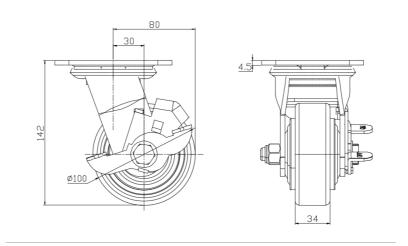

Mounting



^{*} For any deviation between metric and imperial spec, please refer to the metric spec.