



1124 1-1/2" Wide General Purposes Caster Series

CPD (White) Wheel Diameter × Wheel Width 100 x 32mm


EAN

YJ-11240400442023

Swivel Caster, Top Plate Riveted and Stamping with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Mounting Type.  
Zine-Plated, Top Plate (4.5T) Mounting Type mechanism.  
Reinforced Polypropylene Wheel Center and Wheel Tread.  
White, Bearing—Ball Bearings.

Wheel tread: Thermoplastic (PA6)  
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

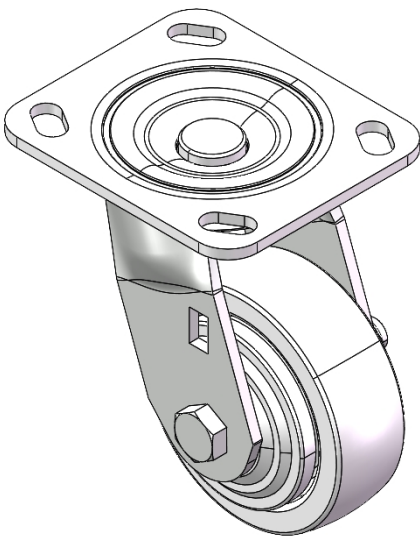

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 4 "                       |
| Wheel Width                                                            | 1-5/16 "                  |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 4-9/16 " x 4 "            |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "         |
| Plate Hole                                                             | 13/16 " x 3/8 "           |
| Offset                                                                 | 1-3/16 "                  |
| Swivel Interference                                                    | 6-3/8 "                   |
| Overall Height                                                         | 5-5/8 "                   |
| Swivel Radius                                                          | 3-3/16 "                  |
| Hardness Of Tread                                                      | 72±5° Shore D             |
| Load Capacity (Dynamic)                                                | 331lbs                    |
| Load Capacity (Static)                                                 | 496lbs                    |
| Temperature                                                            | 4°F to +140°F             |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 3.1lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

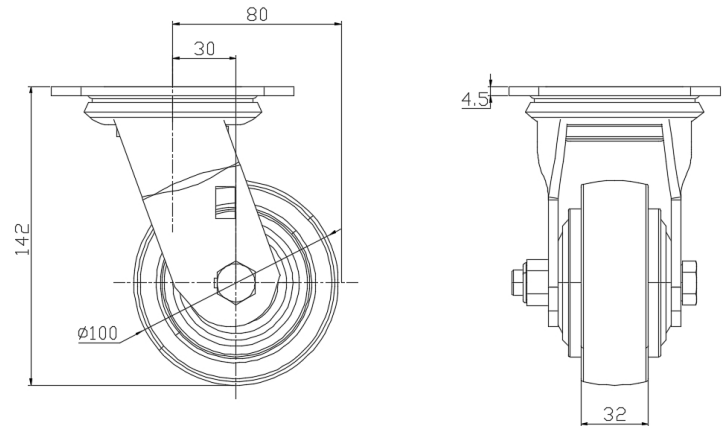

Mounting

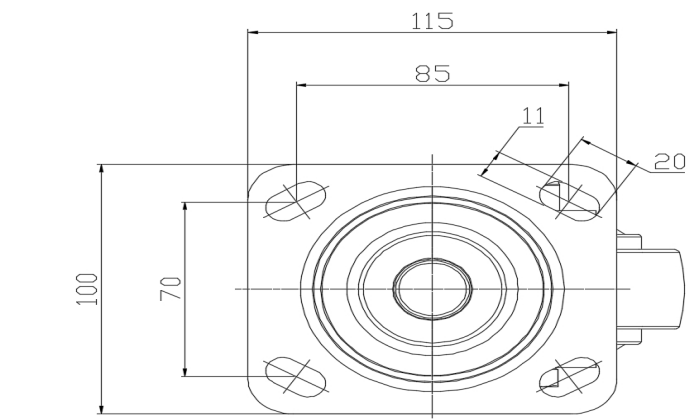

\* For any deviation between metric and imperial spec, please refer to the metric spec.