1124 1-1/2" Wide General Purposes Caster Series



W Resolute (black, dark gray) Wheel Diameter × Wheel Width 100 x 36mm

EAN

YJ-11240400452013

Swivel Caster with Riveted Fork and Stamping Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing

Zine-Plated, Top Plateed (4.5T) Mounting Type system
Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Dark gray finish, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 36mm

Wheel Bearing Wheels With Ball Bearings

115 x 100mm Plate Size **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 30mm Swivel Interference 160mm Overall Height 142mm Swivel Radius 80mm

Hardness Of Tread 72±5° Shore A

140kgs Load Capacity (Dynamic) Load Capacity (Static) 210kgs

-20°C to +60°C Temperature Fork Type **Swivel Caster**

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.38kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

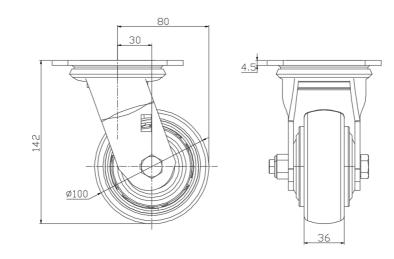

Mounting



^{*} For any deviation between metric and imperial spec, please refer to the metric spec.