

1124 1-1/2" Wide General Purposes Caster Series



QPU (Brown flat) Wheel Diameter × Wheel Width 100 x 34mm


EAN

YJ-11240400532013

Swivel Caster, Top Plate Riveted and Stamping with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Mounting Type. Zine-Plated, Top Plate (4.5T) Mounting Type mechanism. Cast Iron Wheel Center, High Quality Polyurethane tread. Iron brown, Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane  
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

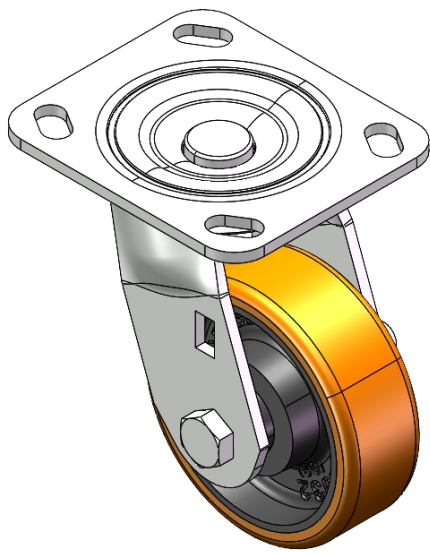

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 100mm                     |
| Wheel Width                                                            | 34mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 115 x 100mm               |
| Bolt Hole Spacing                                                      | 85 x 70mm                 |
| Plate Hole                                                             | 20 x 11mm                 |
| Offset                                                                 | 30mm                      |
| Swivel Interference                                                    | 160mm                     |
| Overall Height                                                         | 142mm                     |
| Swivel Radius                                                          | 80mm                      |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 300kgs                    |
| Load Capacity (Static)                                                 | 450kgs                    |
| Temperature                                                            | -20°C to +70°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 1.88kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

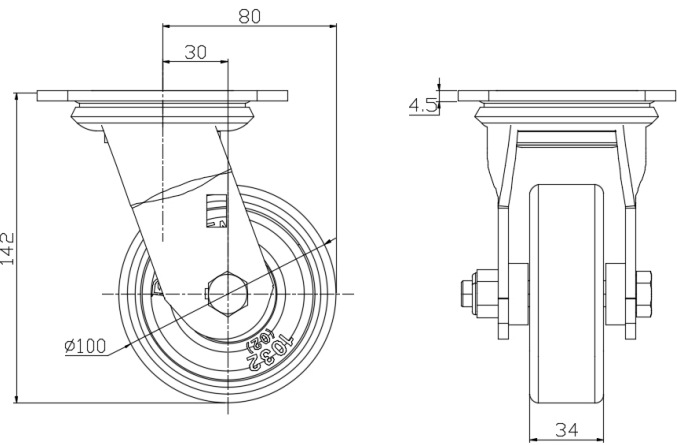

Mounting

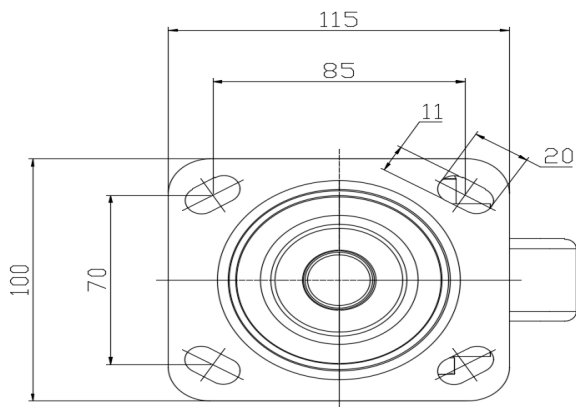

\* For any deviation between metric and imperial spec, please refer to the metric spec.