1124 1-1/2" Wide General Purposes Caster Series



QPU (Brown flat) Wheel Diameter × Wheel Width 100 x 34mm

EAN


YJ-11240400532023

Swivel Caster with Riveted Fork and Stamping Fork - 85×70 mm (3-3/8" x 2-3/4") Bolt Hole Spacing Zine-Plated, Fork-mounted (4.5T) Mounting Type system Cast Iron Wheel Center, High Quality Polyurethane tread Iron brown, Bearing - Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Load Capacity (Static)

Wheel Diameter 100mm
Wheel Width 34mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x70mm Plate Hole 20 x 11mm Offset 30mm Swivel Interference 160mm Overall Height 142mm **Swivel Radius** 80mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 300kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

450kgs

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.94kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation

Dimensions

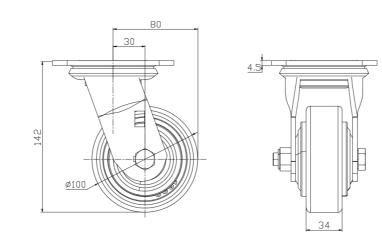

Mounting

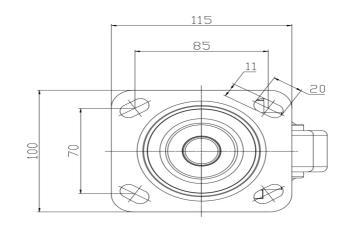

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.