1124 1-1/2" Wide General Purposes Caster Series



QPU (Brown round) Wheel Diameter × Wheel Width 100 x 34mm

EAN


YJ-11240400532043

Swivel Caster, Top Plate Riveted and Stamping with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Mounting Type. Zine-Plated, Top Plate (4.5T) Mounting Type mechanism. Cast Iron Wheel Center, High Quality Polyurethane tread. Iron brown, Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Fork Type

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 34mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 30mm Swivel Interference 160mm Overall Height 142mm **Swivel Radius** 80mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 300kgs

Load Capacity (Static) 450kgs

Temperature -20°C to +70°C

Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.92kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

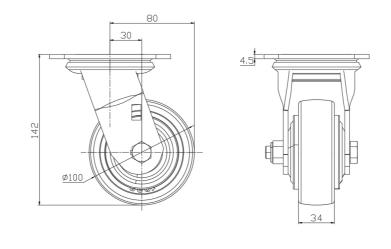

Mounting



^{*} For any deviation between metric and imperial spec, please refer to the metric spec.