1124 1-1/2" Wide General Purposes Caster Series



QPU (Brown round) Wheel Diameter × Wheel Width 100 x 34mm

EAN


YJ-11240400532043

Swivel Caster, Top Plate Riveted and Stamping with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Mounting Type. Zine-Plated, Top Plate (4.5T) Mounting Type mechanism. Cast Iron Wheel Center, High Quality Polyurethane tread. Iron brown, Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 13/16 " x 3/8 " Plate Hole Offset 1-3/16 " 6-3/8 " Swivel Interference 5-5/8 " Overall Height 3-3/16 " **Swivel Radius** Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.2lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

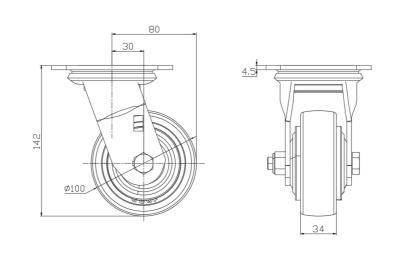

Mounting



^{*} For any deviation between metric and imperial spec, please refer to the metric spec.