1124 1-1/2" Wide General Purposes Caster Series



QPU (Brown flat) Wheel Diameter × Wheel Width 100 x 34mm

EAN


YJ-11240400534013

Center Brake Locking system. Top Plate with Riveted, Stamping Fork and 85×70 mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (4.5T) Mounting Type system. Cast Iron Wheel Center with High Quality Polyurethane tread. Iron brown, Bearing with Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole 2-3/16 " Offset 8-1/2 " Swivel Interference 5-5/8 " Overall Height 4-1/4 " **Swivel Radius** Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.0lbs

Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

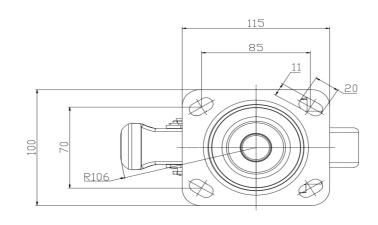

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.