

1124 1-1/2" Wide General Purposes Caster Series



NBR (Milling black) Wheel Diameter x Wheel Width 125 × 40mm


EAN

YJ-11240500042083

Swivel Caster, Top Plate Riveted and Stamping with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Mounting Type. Zine-Plated, Top Plate (4.5T) Mounting Type mechanism. Cast Iron Wheel Center, High-Quality Resilient Rubber tread. Iron black, Bearing—Ball Bearing.

Wheel Tread: high-quality elastic rubber  
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

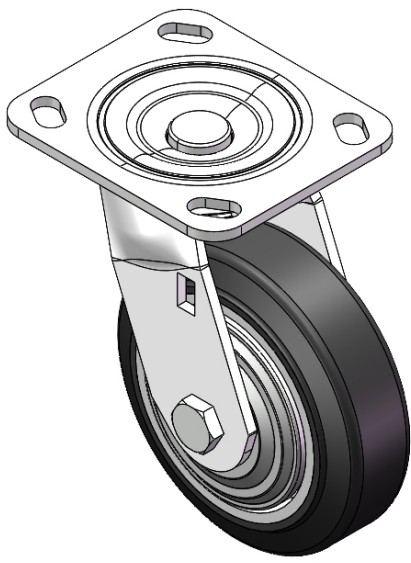

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 125mm                     |
| Wheel Width                                                            | 40mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 115 x 100mm               |
| Bolt Hole Spacing                                                      | 85 x 70mm                 |
| Plate Hole                                                             | 20 x 11mm                 |
| Offset                                                                 | 33mm                      |
| Swivel Interference                                                    | 191mm                     |
| Overall Height                                                         | 164.5mm                   |
| Swivel Radius                                                          | 95.5mm                    |
| Hardness Of Tread                                                      | 85±5° Shore A             |
| Load Capacity (Dynamic)                                                | 200kgs                    |
| Load Capacity (Static)                                                 | 300kgs                    |
| Temperature                                                            | -20°C to +80°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 2.69kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

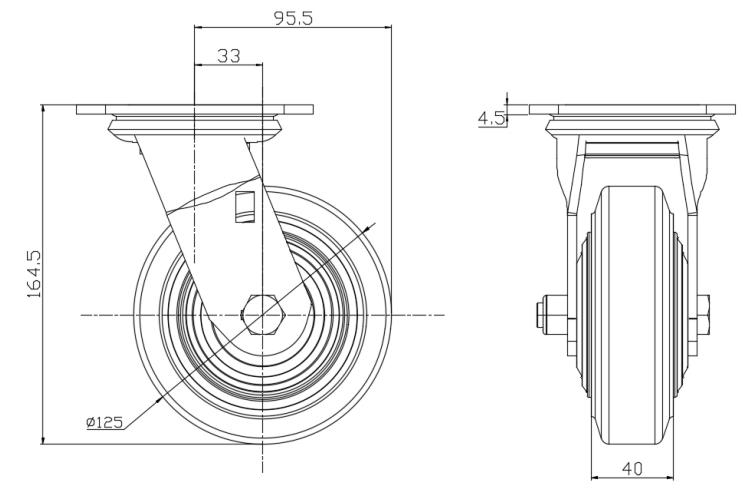

Mounting

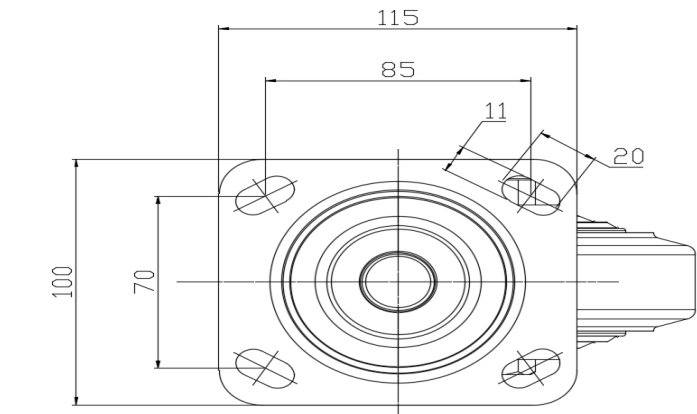

\* For any deviation between metric and imperial spec, please refer to the metric spec.