

1124 1-1/2" Wide General Purposes Caster Series



MRC (Transparent) Wheel Diameter × Wheel Width 125 x 40mm


EAN

YJ-11240500074033

Casters with Side Brakes and With locking system. Top Plate with Riveted Stamping Fork and 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacings. Zine-Plated, Top Plate (4.5T) Mounting Type system. Reinforced Polypropylene Wheel Center and Wheel Tread. Transparent, Bearing with Ball Bearings.

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

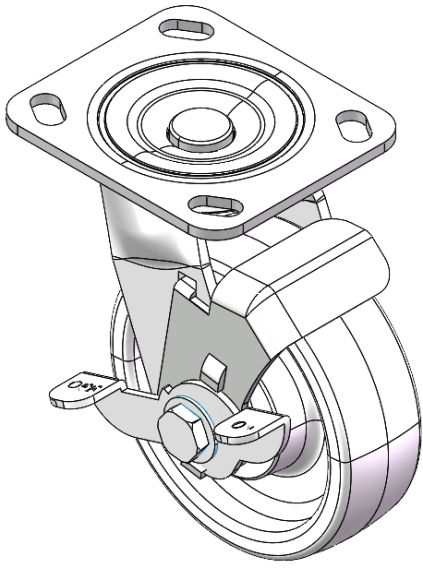

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	125mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	33mm
Swivel Interference	191mm
Overall Height	164.5mm
Swivel Radius	95.5mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	250kgs
Load Capacity (Static)	375kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.05kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

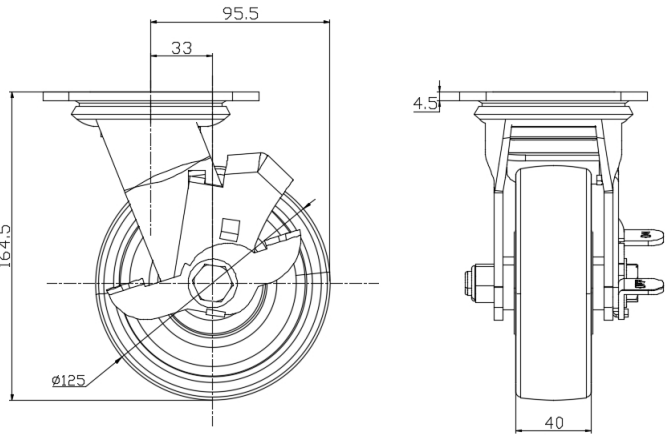

Mounting

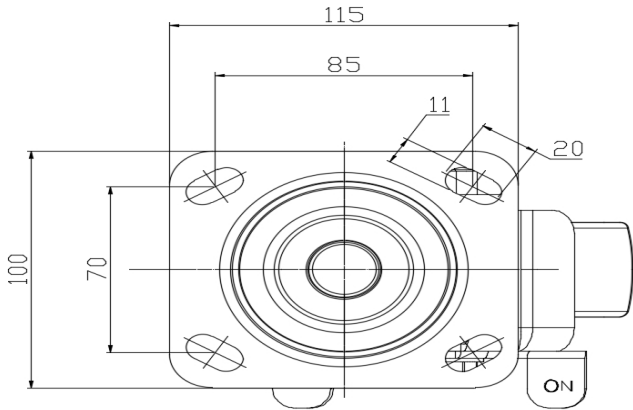

* For any deviation between metric and imperial spec, please refer to the metric spec.