1124 1-1/2" Wide General Purposes Caster Series



CPD (White) Wheel Diameter × Wheel Width 125 x 40mm

EAN

YJ-11240500442033

Swivel Caster, Top Plate Riveted and Stamping with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Mounting Type.

Spacing Mounting Type.

Zine-Plated, Top Plate (4.5T) Mounting Type mechanism.

Reinforced Polypropylene Wheel Center and Wheel Tread.

White, Bearing—Ball Bearings.

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 33mm Swivel Interference 191mm Overall Height 164.5mm **Swivel Radius** 95.5mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 200kgs

Load Capacity (Static) 300kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.67kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


 \bullet \bullet \circ \circ

Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions

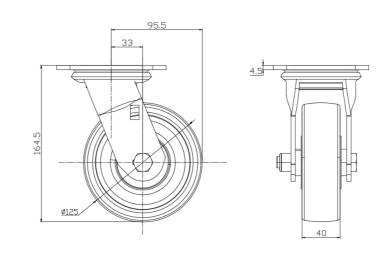

Mounting

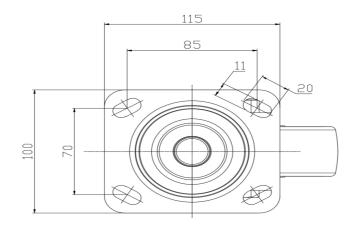

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.