# 1124 1-1/2" Wide General Purposes Caster Series



W Resolute (black, dark gray) Wheel Diameter × Wheel Width 125 x 38mm

EAN

#### YJ-11240500451013

Swivel Caster with Riveted Fork and Stamping Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing

Zine-Plated, Top Plateed (4.5T) Mounting Type system
Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Dark gray finish, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

Fork Type

● Metric ○ Imperial

125mm Wheel Diameter Wheel Width 38mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 33mm Swivel Interference 191mm Overall Height 164.5mm Swivel Radius 95.5mm Hardness Of Tread 72±5° Shore A

150kgs Load Capacity (Dynamic) Load Capacity (Static) 225kgs -20°C to +60°C Temperature

**Swivel Caster** 

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.20kgs Standard ISO22883


#### Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation • • • • •

### **Dimensions**

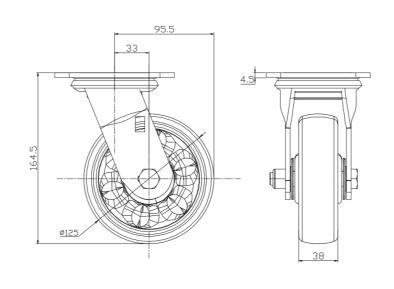

## Mounting

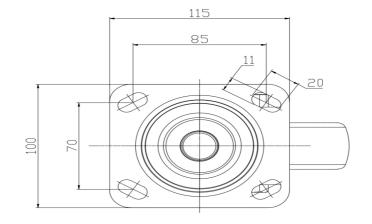

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.