1124 1-1/2" Wide General Purposes Caster Series



QPU (Brown round) Wheel Diameter × Wheel Width 125 x 40mm

EAN


YJ-11240500532033

Swivel Caster, Top Plate Riveted with Fork and 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Zine-Plated, Top Plate (4.5T) Mounting Type system Cast Iron Wheel Center, High Quality Polyurethane tread Iron brown, Bearing—Ball Bearing, with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 33mm Swivel Interference 191mm Overall Height 164.5mm **Swivel Radius** 95.5mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 525kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.63kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

. . . .


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

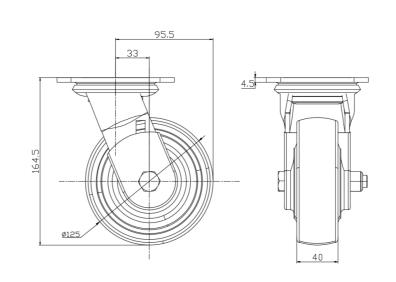

Mounting

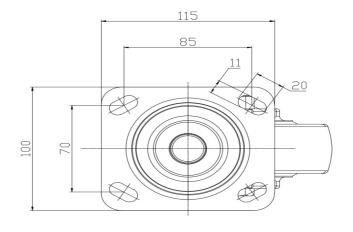

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.