## 1124 1-1/2" Wide General Purposes Caster Series

# Dersheng Casters Keep Rolling

EQPU (Brown round) Wheel Diameter × Wheel Width 125 x 40mm

EAN


YJ-11240500554013

Side brake Caster with Locking system. Top Plate Riveted and Stamping D-shaped footplate. Hole Zine-Plated, Top Plate (4.5T) Mounting Type system Cast Iron Wheel Center with High Quality Polyurethane tread Iron brown, Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 13/16 " x 3/8 " Plate Hole Offset 1-5/16 " 7-9/16 " Swivel Interference 6-1/2 " Overall Height 3-13/16 " **Swivel Radius** Hardness Of Tread 94±5° Shore A

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 827lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.1lbs

Standard ISO22883


### Advantages at a glance

Rolling Resistance • • • • •


Operating Noise • • • •

Floor Surface Preservation • • • • •

#### Dimensions

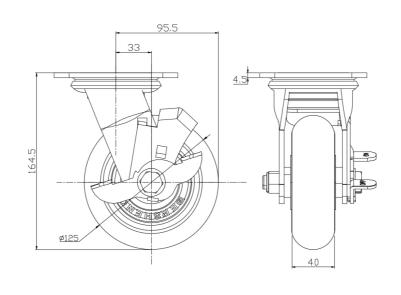

## Mounting

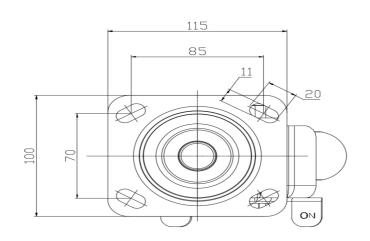

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.