1124 1-1/2" Wide General Purposes Caster Series



SX Rubber Wheel Diameter × Wheel Width 193 x45mm

EAN

YJ-11240800032023

Swivel Caster with Riveted Fork and Stamping Fork with D-shaped hole. Zine-Plated, Top Plate (4.5T) Mounting Type system. Cast Iron Wheel Center with High-Quality Resilient Rubber tread. Iron black, Bearing with Ball Bearing.

Wheel Tread: high-quality elastic rubber Wheel Center: cast iron core/iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 7-11/16 "
Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 4-9/16 " x 4 "

 Bolt Hole Spacing
 3-3/8 " x 2-3/4 "

 Plate Hole
 13/16 " x 3/8 "

 Offset
 1-13/16 "

 Swivel Interference
 11-5/16 "

 Overall Height
 9-1/2 "

 Swivel Radius
 5-5/8 "

 Hardness Of Troad
 80+5° Shore A

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 573lbs

Load Capacity (Static) 860lbs

Temperature -4°F to +248°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 8.1lbs


Standard ISO22883

Advantages at a glance


Rolling Resistance

• • • • • • • • • • • • • • Floor Surface Preservation

Dimensions

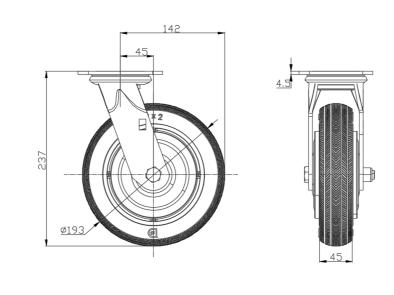

Mounting

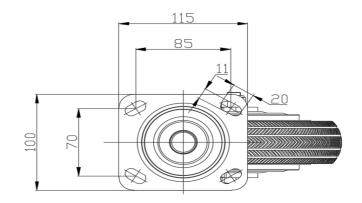

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.